

**Landsat 7 Processing System (LPS)
Output Files
Data Format Control Book**

May 29, 1996

**GODDARD SPACE FLIGHT CENTER
GREENBELT, MARYLAND**

Landsat 7 Processing System (LPS) Output Files Data Format Control Book

May 29, 1996

Prepared by:

Tanweer Aslam Systems Engineering Manager Landsat 7 Processing System Computer Sciences Corporation	Date
--	------

Concurred by:

Ted Ackerson Requirements Manager Earth Science Data & Information System (ESDIS) Project Code 505 Goddard Space Flight Center	Date
---	------

Reviewed by:

Robert Schweiss Systems Engineering Manager Landsat 7 Processing System Code 514 Goddard Space Flight Center	Date
--	------

Darrel L. Williams I Project Scientist Landsat 7 Project Code 923.0 Goddard Space Flight Center	Date
---	------

Approved by:

Joy Henegar Project Manager Landsat 7 Processing System Code 514 Goddard Space Flight Center	Date
--	------

List of TBDs/TBRs

3.1.1/2	TBR - The major frame (scan) level CADU/VCDU quality information is provided in the MSCD file. This information is omitted from band files to avoid their duplication on a scan line basis (e.g., 16 time in a scan for Band 1).
3.1.4	TBR - The major frame (scan) level CADU/VCDU quality information is provided in the MSCD file. This information is omitted from the calibration file to avoid their duplication on a calibration line basis (e.g., 16 time in a scan for Band 1 calibration data).
3.4	TBR - LPS to provide the first minor frame location of the EOL code, detected in each ETM+ scan, in the MSCD file.
3.4	TBR - It is assumed that other Landsat 7 ground stations will comply the LPS internal data format specification for Landsat 7 raw wideband data tapes.
3.4	TBR - Band 6 types are changed to B6L and B6H in the LPS file naming convention (ECS to note change)
4.1	TBR - The calibration file format is changed to HDF-EOS swath to reuse LPS band swath scheme and to avoid Vgrouping of SDS objects. This reduces the number of HDF objects used by LPS.
Section 4	TBR - EOSDIS Project to confirm the need to convert scan_timecode (spacecraft GMT) to scan_time in seconds since midnight on January 1, 1993 to support HDF searches.
All Tables	TBR - Added scan_timecode (spacecraft GMT) to scan_time in seconds since midnight on January 1, 1993. Landsat 7/ECS Projects to confirm this seconds counter start date. LPS Project CCR to provide time conversion.
Table 4-9	TBR - Added EOL location (the minor frame counter value detected during ETM+ major frame construction) in the MSCD file. Requested by IAS to determine original locations of calibration data samples in a major frame.
Table 4-9	TBR - Added mux_assembly_id in the MSCD file to comply LPS F&PS Requirement 3.3.2.28.
Table 4-9	TBR - Added cal_shutter_status in the MSCD file to comply LPS F&PS Requirement 3.3.2.28.
Table 4-9	TBR - Landsat 7 Project to confirm bumper wear allowances of 17 minor frames used in sizing the band and calibration data left- and right-hand side data alignment margins.
Table 4-10	TBD - Total PCD bytes per logical record.

List of TBDs/TBRs (contd.)

- Table 4-10 **TBD** - Spacecraft time drift rate and acceleration ranges
- Table 4-10 **TBD** - Added PCD minor frames filled count
- Table 4-17 **TBR** - ACCA algorithm/program name size (ASCII Bytes)?
- Table 4-17 **TBR** - The WRS scene center scan time is shown in the spacecraft timecode format. EDC/ECS projects may require this time to be broken into searchable fields.
- 4.2.3 **TBR** - Accuracy of values in the metadata examples.
- 4.3 **TBR** - IAS suggests using of band functional status present in the Landsat 7 Calibration file to select the three bands required for multiband scene browse generation.
- 4.3.1 **TBR** - The requirement for JPEG compression of multiband browse images is not yet approved and/or allocated to LPS.
- 4.3.1 **TBR** - Tim Keller had requested a random pick/check of band detectors during browse generation. Is this still in the LPS design? (Check)
- Table 4-18 **TBR** - All mentions of JPEG compression in this table.

[illegible]

Abstract

This Data Format Control Book (DFCB) presents detailed data formats of the output files generated by the Landsat 7 Processing System (LPS). The LPS produces output files for each subinterval identified in a Landsat 7 contact period, the raw wideband data received from the Landsat 7 Ground Station (LGS) during a Landsat 7 spacecraft direct downlink period. Each subinterval consists of an Enhanced Thematic Mapper Plus (ETM+) Format 1 and a Format 2 segment. The LPS output files include Level 0R files, a metadata file, and one or more multiband scene browse files. The Level 0R files include an integer-pixel aligned band data file for each band of the ETM+ instrument, a mirror scan correction data (MSCD) file, a payload correction data (PCD) file, and a calibration data file. The LPS produces a separate set of Level 0R files for the ETM+ Format 1 and Format 2 subintervals. The LPS produces a total of six band data files (Bands 1- 6) for an ETM+ Format 1 subinterval, and a total of three band data files (Bands 6-8, ignoring segmentation for Band 8) for an ETM+ Format 2 subinterval. The LPS produces multiband scene browse files for the ETM+ Format 1 subinterval only. The LPS may produce up to 35 multiband scene browse files for a 14 minute subinterval. A metadata file is produced for each ETM+ format of a subinterval.

The LPS uses the Hierarchical Data Format (HDF) for storing these files in the LPS and for transferring to the EROS Data Center (EDC) Distributed Active Archive Center (DAAC). The EDC DAAC is being developed by the EOSDIS Core System (ECS) Project.

This document is based on the requirements contained in the LPS Functional and Performance Specification (F&PS) and the interface control document (ICD) between the ECS and the Landsat 7 System. It will be baselined by the LPS Project for delivering Landsat 7/LPS output data files to the EDC DAAC.

Keywords: Data Format Control Document (DFCB)
Hierarchical Data Format (HDF)
Landsat 7 Processing System (LPS)
EROS Data Center Distributed Active Archive Center (EDC DAAC)

Preface

This DFCB is controlled by the LPS Project of the Mission Operations and Systems Development Division (MOSDD) and may be updated by a Document Change Notice (DCN) or a revision. Comments and questions regarding this DFCB should be directed to:

Landsat 7 Processing System Project
Code 514
Goddard Space Flight Center
Greenbelt, MD 20771

Table of Contents**Section 1 — Introduction**

1.1	Purpose	1-1
1.2	Scope	1-1
1.3	Intended Users	1-1
1.4	Definitions	1-3
1.5	HDF Data Types.....	1-5

Section 2 — Documentation

2.1	Applicable Documents.....	2-1
-----	---------------------------	-----

Section 3 — LPS Output Files Overview

3.1	Level 0R Files	3-1
3.1.1	Band Data File(s).....	3-1
3.1.2	Mirror Scan Correction Data File	3-2
3.1.3	Payload Data File	3-2
3.1.4	Calibration Data File.....	3-3
3.2	Metadata File	3-4
3.3	Multiband Scene Browse Files	3-4
3.4	File Naming Convention.....	3-5

Section 4 — LPS Output File Formats

4.1	LPS File Formats (HDF).....	4-1
4.1.1	Band Data File Format (HDF-EOS Swath)	4-1
4.1.1.1	Band Data File - Swath Format Overview.....	4-1
4.1.1.2	Band Data File Volume(s)	4-3
4.1.2	MSCD File Format (HDF Vdata).....	4-16
4.1.2.1	MSCD File Description.....	4-16
4.1.3	PCD File Format (HDF Vdata).....	4-23
4.1.3.1	PCD File Description.....	4-23
4.1.4	Calibration Data File Format (HDF-EOS Swath)	4-37
4.1.4.1	Calibration Data File - Swath Format Overview....	4-37
4.1.4.2	Calibration Data File Volume(s).....	4-37
4.2	Metadata File Format (HDF ODL/PVL)	4-49
4.2.1	Metadata File Description	4-49
4.2.3	Metadata File Format - HDF ODL/PVL Examples.....	4-72
4.2.3.1	HDF PVL Example - Format 1 Metadata File	4-72
4.2.3.2	HDF PVL Example - Format 2 Metadata File	4-75
4.3	Multiband Browse File Format (HDF RIS24)	4-78
4.3.1	Multiband Browse File Overview	4-78

Acronym List

List of Figures

Figure 4-1: Band Data File - HDF-EOS Swath Structure	4-5
Figure 4-2: Band Data File - ECS-HDF Swath Overview	4-6
Figure 4-3: Calibration Data Files - Band Sequential Organization	4-39
Figure 4-4: Calibration Data File (Format 1 Example)	4-40
Figure 4-5: Calibration Data File - SDS Array and Dimensions.....	4-41
Figure 4-6: Multiband Scene Browse File - 24-bit Raster Image	4-80

List of Tables

Table 4-1: LPS Output Files - HDF Object Structures	4-2
Table 4-2: Band Data File - Swath Definition Parameters	4-7
Table 4-3: Band Data File - HDF Swath Attributes	4-8
Table 4-4: Band Data File - HDF Swath Data Field Dimensions	4-8
Table 4-5: Band Data File - HDF Swath Geolocation Fields.....	4-9
Table 4-6: Band Data File - HDF Swath Geolocation Filed Dimensions...	4-12
Table 4-7: Band Data File - HDF Swath Dimension Map	4-14
Table 4-8: Band Data File - HDF Swath Index Dimension Map.....	4-15
Table 4-9: MSCD File - HDF Vdata Definition and Fields.....	4-17
Table 4-10: PCD File - HDF Vdata Definition and Fields	4-24
Table 4-11: Calibration Data File - Swath Definition Parameters	4-42
Table 4-12: Calibration Data File - HDF Swath Attributes	4-44
Table 4-13: Calibration Data File - HDF Swath Data Field Dimensions ..	4-44
Table 4-14: Calibration Data File - HDF Swath Geolocation Fields.....	4-45
Table 4-15: Calibration Data File - Swath Geolocation Filed Dimensions	4-47
Table 4-16: calibration Data File - HDF Swath Dimension Map.....	4-48
Table 4-17: Metadata File Format - ODL/PVL Parameter Values	4-50
Table 4-18: Multiband Browse File - HDF RIS24 Object Definition.....	4-81
Table 4-19: Multiband Browse RIS24 File Label and Description.....	4-83

Section 1 — Introduction

1.1 Purpose

This data format control book (DFCB) defines detailed formats of the output (Level 0R, metadata, and multiband browse) files generated by the Landsat 7 Processing System (LPS). The LPS makes these files available, on a Landsat 7 contact period basis, for pick up by the EROS Data Center (EDC) Distributed Active Archive Center (EDC DAAC).

The LPS output file formats described in this DFCB are based on the requirements contained in the LPS Functional and Processing Specification (F&PS) and the Interface Control Document (ICD) Between the EOSDIS Core System (ECS) and the Landsat 7 System (ECS-L7).

1.2 Scope

This DFCB describes the data contents and Hierarchical Data Format (HDF) details for the LPS output files. The functional, performance, operational and interface design details for the transfer of these files from LPS to the ECS EDC DAAC are contained in the ECS-L7 ICD. The contents of the LPS output files defined in this DFCB are based on the Landsat 7 ETM+ instrument and payload correction data (PCD) details contained in the Landsat 7 Data Format Control Book, Volume IV - Wideband Data, the LPS F&PS, the ECS-L7 ICD, and the HDF documents/specifications available from the ECS Project and/or the National Center for Supercomputing Applications (NCSA).

The file formats contained in this DFCB are applicable to the interface between the ECS EDC DAAC and the LPS. This DFCB does not contain specific details on the file formats for the Landsat 7 Level 0R products generally requested by the Landsat 7 users and provided by the ECS EDC DAAC. Detailed formats for the Level 0R products, required by the Landsat 7 users, are defined in a separate document, the Landsat 7 0R Distribution Product DFCB (Applicable Document 2.1.9).

1.3 Intended Users

This document is intended as a supplement to the ECS-L7 ICD. Therefore, the LPS and the EOSDIS Projects are the primary users of this document. This document contains detailed information on the LPS output data file formats to allow users on both project sides to proceed with independent development of the LPS and EDC DAAC (systems).

This DFCB provides detailed information on the contents of the LPS Level 0R output files (band, mirror scan correction data, payload correction data, and calibration data) and the metadata and multiband scene browse files associated with the L0R processed subinterval. Both the EDC DAAC and Landsat 7 users are interested in this data. The primary intention of the data formats contained in this DFCB is to support the development of the direct interface between the LPS and the EDC DAAC. The Level 0R details contained in this DFCB, though useful, are not intended for use by the Landsat 7 users. Complete details on the Landsat 7 Level 0R products desired by the Landsat 7 user/scientist community are defined in a separate Landsat 7 project document, the Landsat 7 0R Distribution Product DFCB (Applicable Document 2.1.19).

This DFCB should be used in conjunction with the Landsat 7 System Data Format Control Book (DFCB), Volume 4 - Wideband Data (Applicable Document 2.1.1) to get complete details on the band (ETM+ major and minor frame structures), the MSCD, the PCD (cycle, major frame and minor frame organization), and the calibration (starting and ending minor frames for each band) data included in the LPS Level 0R output files. Complete details on the HDF data structures used in construction of LPS output files are provided in the following applicable documents (also listed in Section 2):

1. Hughes Applied Information Systems, Inc., HDF-EOS Primer for Version 1 EOSDIS, White Paper, 175-WK-001-001, April 1995.
2. Hughes Applied Information Systems, Inc., The HDF-EOS Swath Concept, White Paper, 170-WP-003-001, December 1995.
3. CCSDS Recommendation for Space Data System Standards, Parameter Value Language - A Tutorial, CCSDS 641.0-G-1, Green Book Issue 1, May 1992.
4. GSFC, EOSDIS Browse Delivery Package Description, Preliminary Draft, June 23, 1995.
5. University of Illinois at Urbana-Champaign, National Center for Supercomputing Applications (NCSA), HDF User's Guide, June 1995.
6. University of Illinois at Urbana-Champaign, National Center for Supercomputing Applications (NCSA), HDF Reference Manual, February 1994.
7. Hughes Information Technology Corporation, HDF-EOS User's Guide for the ECS Project, Revision 1 (Draft), April 1996.

1.4 Definitions

The following terms, as defined in this section, are commonly used throughout this document to clarify the scope, contents, and format of LPS output files.

1. Landsat 7 Contact Period: The time duration between the start and end of raw wideband data transmissions from the Landsat 7 spacecraft to a ground station [e.g., the Landsat 7 Ground Station (LGS)]. Figure 1-1 illustrates the Landsat 7 contact period concept.

2. Interval: The time duration between the start and end of an imaging operation (land observation) by the ETM+ instrument on board the Landsat 7 spacecraft. The raw wideband data collected during an interval consists of a contiguous set of WRS scenes.

3. Subinterval: A segment of a raw wideband data interval received during a Landsat 7 contact period. Subintervals are caused by breaks in the wideband data stream due to communication dropouts and/or the inability of the spacecraft to transmit a complete observation (interval) within a single Landsat 7 contact period. The largest possible subinterval can be as long as a full imaging interval (a set of contiguous WRS scenes) transmitted during an uninterrupted contact period. The smallest possible subinterval can be as small as a set of a few contiguous ETM+ scans (a partial WRS scene). The smallest size of a subinterval is an operator modifiable parameter in LPS. If the smallest subinterval size is chosen to be as long as a full WRS scene, it will contain approximately 24 seconds worth of ETM+ data or 335 scans (without the 20 overlapping scans each, at top and bottom, between adjacent scenes). The ETM+ raw wideband data, collected for a single imaging observation by the Landsat 7 spacecraft, is received in two parts, ETM+ Format 1 and ETM+ Format 2, by the LPS. The LPS produces a separate subinterval (part) for each ETM+ format. Figures 1-1 and 1-2 illustrate the subinterval concept.

4. ETM+ Format 1: The ETM+ Format 1 major frames contain all data (e.g., imaging and calibration) from and associated with Bands 1-6. The MSCD and PCD data are duplicated in both ETM+ formats.

5. ETM+ Format 2: The ETM+ Format 2 major frames contain all data (e.g., imaging and calibration) from and associated with Bands 6-8. The MSCD and PCD data are duplicated in both ETM+ formats.

6. LPS String: A functional and physical entity of the LPS responsible for the end-to-end processing of either Format 1 or Format 2 ETM+ raw wideband data received via a return link channel (I or Q) of an X-band downlink from the LGS.

7. LPS (output) Files: The generic term used to denote the grouping of Level 0R, browse and metadata files for a single subinterval. See Figure 1-2.



Intervals Mapped to Ground Contacts

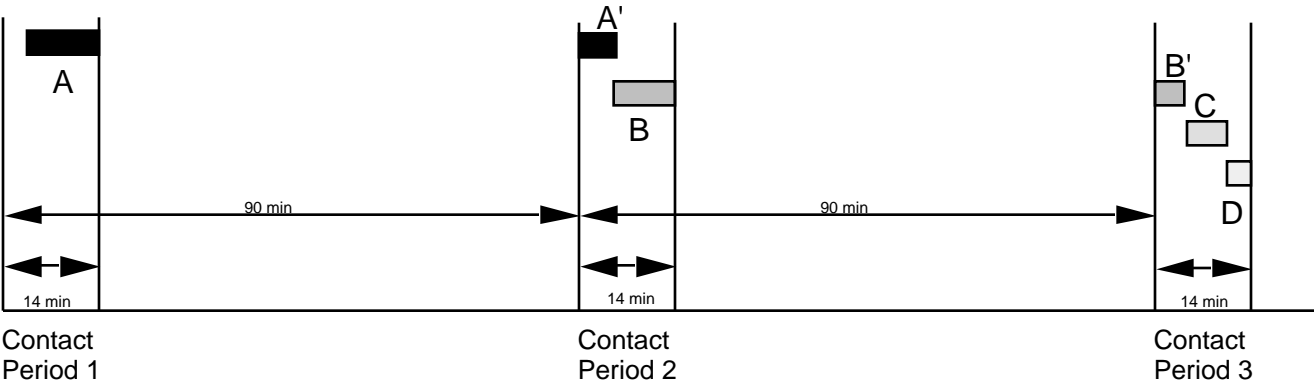


Figure 1-1: Landsat 7 Contact Periods Concept

8. Level 0R Files: The generic term used to denote the grouping of band, MSCD, PCD and calibration data files for a single subinterval. See Figure 1-2.

9. Level 0R Quality and Accounting Data: The data quality and accounting information collected by the LPS, on a subinterval basis, from processing of the ETM+ major frames constructed from the wideband Virtual Channel Data Units (VCDUs) received during a Landsat 7 contact period.

1.5 HDF Data Types

The following data types are used throughout this DFCB:

HDF C Language Notation	Data Type	No. of Bytes
char8	8-bit ASCII character	1
int8	8-bit signed integer	1
uint8	8-bit unsigned integer	1
int16	16-bit signed integer	2
uint16	16-bit unsigned integer	2
int32	32-bit signed integer	4
uint32	32-bit unsigned integer	4
float32	32-bit floating point number	4
float64	64-bit floating point number	8

In addition, the following terms are synonymously used to denote the length of a given data type field in an LPS and/or HDF data structure (Vdata, SDS, etc.):

Order: This term denotes a Vdata field length of the data type as shown. For example, if the data type is 'uint16' with an order of '2', the HDF field size is 4 bytes.

Count: This term denotes an SDS field length of the data type as shown.

Size: This term denotes the size of an LPS file attribute/field in total number of bytes.

LPS Wideband Data (Inputs)



LPS Files (Outputs)

a. Level 0R Files:

- Image Data			
- Cal Data			
- PCD			
- MSCD			

b. Multinand Browse Scenes

--	--	--	--

c. Metadata

--	--	--	--

- L0R Q&A Data

Cal: Calibration
L0R: Level 0R
MSCD: Mirror Scan Correction Data
PCD: Payload Correction Data
Q&A: Quality and Accounting

Figure 1-2: LPS Files for Landsat 7 Contact Period 3

Section 2 — Documentation

The following documents provide additional detail and reference information regarding the format of LPS output files. Except in the case of the LPS F&PS, if any information contained in these documents conflicts with this DFCB, the contents of the DFCB shall prevail.

2.1 Applicable Documents

1. NASA GSFC/MO&DSD, Landsat 7 Processing System (LPS) Functional and Performance Specification (F&PS), Revision 1, 560-8FPS/0194, July 28, 1995.
2. NASA GSFC, Interface Control Document (ICD) Between the EOSDIS Core System (ECS) and the Landsat 7 System, Final, 209-CD-013-001, July 1995.
3. National Aeronautics and Space Administration (NASA) Goddard Space Flight Center (GSFC) Landsat 7 Detailed Mission Requirements, May 15, 1995.
4. Lockheed Martin Missiles and Space, Landsat 7 System Data Format Control Book (DFCB), Volume IV - Wideband Data, Revision C, 23007702-IVC, April 4, 1996.
5. Hughes Applied Information Systems, Inc., HDF-EOS Primer for Version 1 EOSDIS, White Paper, 175-WK-001-001, April 1995.
6. Hughes Applied Information Systems, Inc., The HDF-EOS Swath Concept, White Paper, 170-WP-003-001, December 1995.
7. CCSDS Recommendation for Space Data System Standards, Parameter Value Language - A Tutorial, CCSDS 641.0-G-1, Green Book Issue 1, May 1992.
8. GSFC, EOSDIS Browse Delivery Package Description, Preliminary Draft, June 23, 1995.
9. GSFC, Landsat 7 OR Distribution Product Data Format Control Book, HDF Version, 1996.
10. University of Illinois at Urbana-Champaign, National Center for Supercomputing Applications (NCSA), HDF User's Guide, June 1995.
11. University of Illinois at Urbana-Champaign, National Center for Supercomputing Applications (NCSA), HDF Reference Manual, February 1994.
12. Hughes Information Technology Corporation, HDF-EOS User's Guide for the ECS Project, Revision 1 (Draft), April 1996.

Section 3 — LPS Output Files Overview

3.1 Level 0R Files

The primary outputs of the LPS consist of Level 0R files, the metadata (file), and multiband scene browse files. The Level 0R files include ETM+ instrument band (image) data, mirror scan correction data (MSCD), payload correction data (PCD), and calibration data files. The band file(s) contain the Level 0R processed science data collected from the Landsat 7 ETM+ instrument. A Level 0R band file contains reformatted, unrectified, subinterval data having a sequence of pixels that is spatially consistent with the ground coverage. The radiometric calibration, attitude, and ephemeris data, associated with the band file, are provided in the payload correction and calibration data files. The MSCD file provides additional scan-related information for subsequent processing of the band file data to Level 1R. The LPS provides one set of Level 0R data and a metadata file for each ETM+ data format: Format 1 and Format 2. The multiband scene browse data files are provided for Format 1 data only. These data formats are associated with Bands 1-6 and Bands 6-8 of the ETM+ instrument, respectively.

The following sections describe the Landsat 7 Level 0R data contents of LPS output files. Details about LPS file formats, using the HDF file structures, are provided in Section 4.

3.1.1 Band Data File(s)

The LPS generates two sets of band files, one each for ETM+ Format 1 and ETM+ Format 2 Data. Bands 1 - 6 files are generated for the ETM+ Format 1 data. Bands 6 - 8 files are produced for the ETM+ Format 2 data. The Band 8 data, which could exceed the 2 GB restriction for HDF files, is contained in as many as four file segments. The number of Band 8 file segments produced by LPS depends on the size/duration of a Level 0R processed subinterval. The largest size subinterval to be processed by LPS is expected be approximately 5 GB (35 scenes for a 14 minute subinterval/contact period) LPS. As a result, a Band 8 file segment can be as large as 1.25 GB (See Section 4.1.1.2).

Each band file contains detector (scan line) data produced by a single band during a Level 0R processed subinterval. The scan line data is grouped by detectors such that, for a given major frame, detector 1 data is followed by detector 2 data, detector 2 data is followed by detector 3 data, and so on. Reverse scans are reversed. This data is nominally aligned using fixed and predetermined integer-pixel values to provide alignment for band offset, odd/even detectors, and forward and reverse scans. To avoid data duplication, ETM+ data quality and accounting information is provided in the MSCD file. This information includes counts of BCH corrected and

uncorrected VCDUs, as well as ETM+ major frame synchronization errors corresponding to band data lines in a scan. **(TBR)**

The LPS uses the ECS-HDF swath format for producing the band file(s). Section 4.1.1 provides details on the swath format of the LPS band file(s).

3.1.2 Mirror Scan Correction Data File

An MSCD file is generated by LPS from each subinterval found in a contact period. One MSCD file is created for each ETM+ data format, Format 1 and Format 2, of a subinterval. An MSCD file consists of data records for each major frame (ETM+ scan) received in a subinterval. Each MSCD record contains the Scan Line Data (SLD) extracted from the two minor frames following the End of Line (EOL) Code in each major frame of a subinterval. The SLD includes the first half scan error (FHS ERR), the second half scan error (SHS ERR), and the Scan direction (SCN DIR) information for the previous ETM+ scan. The spacecraft time associated with the SLD source major frame is also appended with each MSCD record. Data quality information, such as counts of BCH corrected and uncorrected VCDUs and the number of CADUs detected with bit slip errors, is also provided on a major frame (ETM+ scan) basis for each MSCD record. **(TBR)**

The LPS uses the HDF Vdata format for generating the MSCD file. Section 4.1.2 describes the HDF Vdata format for the LPS MSCD file.

3.1.3 Payload Data File

A PCD file is generated by the LPS for each subinterval found in a contact period. One each PCD file is created for the ETM+ Format 1 and Format 2 data in a subinterval. Both the Format 1 and Format 2 PCD files are expected to contain exactly the same PCD unless one format, received by an LPS string, contains more errors than the other. A PCD file contains all PCD major frames received during a subinterval. Each PCD major frame is repeated at the PCD cycle rate. A PCD cycle consists of four unique major frames identified as PCD major frames (0), (1), (2), and (3). The PCD for each major frame is provided in engineering units (EUs), as appropriate. The PCD quality and accounting information, such as missing PCD words and PCD byte voting errors, is included in each PCD major frame. Partially received/assembled PCD minor and major frames are filled. Missing PCD major frames are also substituted with filled major frames.

The LPS uses the HDF Vdata format for generating the PCD file. Section 4.1.3 describes the HDF Vdata format for the LPS PCD file.

3.1.4 Calibration Data File

The LPS generates two calibration data files, one each for ETM+ Format 1 and Format 2, for each subinterval. The Format 1 file contains all calibration data for Bands 1 - 6. The Format 2 file contains all calibration data for Bands 6 - 8.

The calibration data in each file is organized in a band sequential manner such that all calibration data for Band 1 is grouped first, followed by all calibration data for Band 2, and so on. The calibration data for each band consists of all band deinterleaved detector data from all minor frames, starting with the EOL minor frames, of all ETM+ scans in a subinterval. Data from each detector in a scan is used to form a single calibration data line in a band group. For a given band, calibration data from all detectors in a scan is repeated in a scan/detector incrementing sequence (i.e., Scan 1/Detector 1, Scan 1/Detector 2, Scan 1/Detector 3 ... Scan 2/Detector 1, Scan 2/Detector 2, Scan 2/Detector 3, and so on) to form calibration data lines. Reverse scans (calibration data lines) are reversed during construction of a calibration file. All calibration data lines, forward and reverse, are aligned by applying the same integer-pixel shifts used in aligning the band data lines. The time of the ETM+ major frame corresponding to each calibration data line is also provided.

Each calibration data line contains all band-detector data starting with the EOL code (2 minor frames) in the current scan till the start of the Line Sync Code (LSC) for the next ETM+ scan. Thus, each scan/detector calibration data line contains two band-detector deinterleaved bytes of the EOL code word in the first two byte locations; two bytes of Scan Line Data (SLD) word (2 minor frames), containing the FHS ERR, SHS ERR and SCN DIR words, in the next two byte locations; and all calibration and Fill Data found between the SLD and the next LSC, in subsequent byte locations. No calibration data (scan/detector words and/or minor frames) are dropped/omitted while constructing a calibration data line. Detailed information on the locations of calibration data bytes, located between the EOL and LSC in an ETM+ scan, is provided in the Landsat 7 Wideband data DFCB (Applicable Document 2.1.4). The ETM+ data quality and accounting information such as counts of BCH corrected and uncorrected VCDUs and ETM+ major frame synchronization errors, corresponding to band/calibration data lines in a scan, is provided in the MSCD file. **(TBR)**

The LPS saves the original location (minor frame counter value) of the first minor frame of the EOL code, for each ETM+ scan, in the MSCD file **(TBR)**. The EOL original location can later be used as a reference to determine the actual location (distance from the first minor frame of the EOL code) of each calibration data sample (band-detector data) in an ETM+ scan.

The LPS uses the HDF SDS format for generating the calibration data file. Section 4.1.4 describes the HDF Vdata format for the LPS calibration data file.

3.2 Metadata File

A metadata file is generated by LPS for each subinterval found in a contact period. The LPS generates a metadata file for each ETM+ data format, Format 1 and Format 2, of a subinterval. The Format 1 metadata file contains identification and quality and accounting information on the Level 0R processed data for Bands 1 - 6. Similarly, the Format 2 metadata file contains identification and quality and accounting information on the Level 0R processed data for Bands 6 - 8.

A metadata file contains information on the Level 0R processed data provided in its respective subinterval: the names of all band data, calibration data, payload correction data, mirror scan correction data, and multiband scene browse files associated with the subinterval. The metadata also includes quality and accounting information on the return link wideband data used in generating the Level 0R file(s). In addition, metadata includes quality and accounting information on received and processed PCD and cloud cover assessment for the WRS scenes contained in the associated subinterval. The metadata is used by EDC DAAC users to determine the subinterval and/or WRS scene level quality of the Level 0R data stored in the EDC DAAC archive before ordering it on a cost basis.

The LPS uses the HDF ODL/PVL format for generating the metadata file. Section 4.2 provides the HDF ODL/PVL format required details for the LPS metadata file.

3.3 Multiband Scene Browse Files

A multiband scene browse file is a reduced data volume file of the Level 0R band/image data which can be viewed on a scene basis to determine general ground area coverage and spatial relationships between ground area coverage and cloud coverage. The multiband scene browse data from three predetermined bands of the ETM+ Format 1 data are contained in a multiband scene browse file. The LPS generates a multiband scene browse file from each of the full resolution scenes (band-detector image data) contained in the three predetermined Level 0R band data files of a subinterval.

The LPS uses the HDF RIS24 format for generating the multiband scene browse file. Section 4.3 provides HDF RIS24 format required details for the LPS multiband scene browse file.

3.4 File Naming Convention

The ECS and LPS projects have agreed to the following convention for naming the LPS output files:

File Name: L7XsssfnYYDOYHHuuv.xxx where

Description	Remarks
L7 indicates the Landsat 7 mission	Fixed to "L7" for all files generated by LPS
X = 1, 2, or 3 for the L7 X-band data routed by LGS to an LPS String	Obtained by LPS from the Landsat 7 contact period schedule and the matrix switch connection information received from LGS.
sss indicates data capture ground station, for example: sss = "EDC" at Sioux Falls, SD	A parameter entered by the operator at LPS initialization or prior to Level 0R processing.
f indicates ETM+ data format: f = 1 for Format 1 data f = 2 for Format 2 data	Identifies the ETM+ Format 1 or 2 data contained in this file. The ETM+ format information is taken from the "PCD/Status Data" field of the first error-free VCDU of the first major frame of the subinterval reported in this file.
n indicates LPS processor number (1-9)	A predetermined number for each LPS string. Only 5 LPS strings are available now.
YYDOYHH: indicates the Landsat 7 contact period start date and time for this file, where YY = Last two digits of year associated with a contact period DOY = Julian day of year (001 through 366) associated with the contact period HH = Hour of the contact period within a 24-hour day (00-23)	The Julian date and Greenwich Mean Time (GMT) obtained by LPS from the Landsat 7 contact period schedule received from LGS or from the raw data tapes received from other Landsat 7 ground stations, if any** (TBR) . ** It is assumed that other Landsat 7 ground stations will comply the LPS internal data format specification for Landsat 7 raw wideband data tapes.

Description	Remarks
uu indicates a subinterval number within this contact period (01- 99)	<p>Generated by LPS during Level 0R processing.</p> <p>No Level 0R files are generated when no subintervals can be found in a contact period (probably containing extremely noisy data). The LPS operations learns about this problem from the Level 0R quality and accounting report for the processed contact period.</p>
<p>v indicates file version number:</p> <p>v = 0 for the L0R processed data generated during the first processing run of a contact period.</p> <p>v = 1 - 9 for reprocessed Level 0R data generated during subsequent processing runs of the same contact period.</p>	<p>A reprocessing indicator used to distinguish the Level 0R files generated from a single contact period during multiple processing runs. The reprocessing information is entered by an operator during setup of a Level 0R processing operation.</p>
<p>xxx indicates an LPS File type:</p> <p>xxx = Bis for band files where</p> <p>B indicates a band file, i indicates ETM+ band IDs 1 - 8 s indicates a file segment number or type s = 0 for single segment files for Bands 1 - 5 and 7 s = "L" or "H" for the Band 6 low and high gain status, respectively (TBR) s = 1 - 4 for Band 8 file segments</p> <p>xxx = "MSD" for an MSCD file xxx = "PCD" for a PCD file xxx = "CAL" for a calibration file xxx = "MTA" for a metadata file xxx = "R"nn for multiband scene browse files where</p> <p>nn = 01-99 indicates the WRS scene number identified in the metadata file.</p>	<p>No Level 0R files are generated when no subintervals can be found in a contact period (probably containing extremely noisy data). The LPS operations learns about this problem from the Level 0R quality and accounting report for the processed contact period.</p> <p>The Band 6 Gain Status is obtained from the PCD/Status Data field of the first error-free VCDU of the first major frame used in file generation. At present, the ETM+ Format 1 and Format 2 data is expected to contain the Band 6 Low and High Gain data, respectively.</p> <p>The LPS Band 8 Level 0R processed data is into 1.5 Gigabyte (GB) segments to meet the HDF maximum file size limitation of 2 GB.</p> <p>Partial scenes are identified similarly to full scenes. Partial scenes band data, if received, will be located at the start and end of a subinterval and included in the first and the last browse scenes of the subinterval. At present, a maximum of 35 WRS scenes are expected in a 14-minute long subinterval.</p>

Section 4 — LPS Output File Formats

4.1 LPS File Formats (HDF)

The EOSDIS project has selected the hierarchical data format (HDF) for exchanging data with external systems. The EOSDIS Project also uses the HDF for storing the received data in its active archives. The HDF supports standard data structures such as Vdata and Scientific Data Set (SDS) for storing various types of data. Applicable details on various data structures supported by the HDF are provided in Applicable Documents 5 and 10. The EOSDIS Project has also developed special HDF structures and a support library such as the HDF-EOS Swath for handling multiband remote sensing data collected by various satellites. The EOSDIS project has also adopted industry standards such as the Consultative Committee on Space Data Systems (CCSDS) Object Description Language/Parameter Value Language (ODL/PVL) for handling English text like data. Table 4-1 identifies the HDF-EOS object structures used by LPS in generating the Level 0R output files, the metadata file and multiband scene browse files.

4.1.1 Band Data File Format (HDF-EOS Swath)

4.1.1.1 Band Data File - Swath Format Overview

The LPS uses the HDF-EOS Swath structure for constructing Band files. An LPS band file contains a single swath object. A swath object consists of a set of data fields, a set of geolocation fields, dimension information on each of the data and geolocation fields, and mapping of the geolocation fields to the data fields. Within LPS band files swath context, the ETM+ instrument band-detector (scan line) data corresponds to the swath data field and information (such as spacecraft time, scan number, scan direction and scan line number) about the band-detector data correspond to the swath geolocation fields. The dimension information associates each geolocation field to the data field (array) dimensions (along track (scan lines) and/or across track (pixels). The WRS scene framing information (center and corner latitudes and longitudes) is associated with the band data dimensions using a list of indices (index dimension). Figures 4-1 provides a structural overview of an HDF-EOS swath file/object for band data. Figure 4-2 provide an overview of the LPS band data organized under the HDF-EOS Swath structure. Tables 4-2 through 4-8 contain data, geolocation, and dimension details on the HDF-EOS Swath structure for constructing LPS band files.

Table 4-1: LPS Output Files - HDF Object Structures

LPS File	Applicable ETM+ Formats		File Contents (Note 1)	HDF Object Structure
Level 0R Files:				
Band 1 Image Data	1		Binary	Swath
Band 2 Image Data	1		Binary	"
Band 3 Image Data	1		Binary	"
Band 4 Image Data	1		Binary	"
Band 5 Image Data	1		Binary	"
Band 6(L) Image Data	1		Binary	"
Band 6(H) Image Data		2	Binary	Swath
Band 7 Image Data		2	Binary	"
Band 8 Image Data (1 - 4 segments, 1 file per segment)		2	Binary	"
Mirror Scan Correction Data (MSCD)	1	2	Mixed	Vdata
Payload Correction Data	1	2	Mixed	Vdata
Calibration Data (Bands 1 - 6(L))	1		Binary	Swath (TBR)
Calibration Data (Bands 6(H) - 8)		2	Binary	Swath (TBR)
Level 0R Related Files:				
Metadata	1	2	ASCII Text	Object Description Language /Parameter Value Language (ODL/PVL)
- Subinterval Level Metadata	1	2		
- WRS Scene Level Metadata	1	2		
- ACCA Results	1			
- Level 0R Q&A	1	2		
Multiband Scene Browse (one scene per file)	1		Binary	RIS24

Note 1: Applies to data and/or ancillary information formats only.

4.1.1.2 Band Data File Volume(s)

The following assumptions and band data volume information are used in defining HDF SDS objects and attributes for LPS band files:

1. ETM+ scans per scene:
 - Nominal: 335 (received WRS scene without scans overlap)
 - Maximum: 375 (distribution WRS scene with scans overlap)
2. Scan data lines (nominal, without scans overlap) per scene:
 - Bands 1 - 5 and 7: $335 \times 16 = 5,360$
 - Band 6: $335 \times 8 = 2,680$
 - Band 8: $335 \times 32 = 10,720$
3. Scan data lines (maximum, with scans overlap) per scene:
 - Bands 1 - 5 and 7: $375 \times 16 = 6,000$
 - Band 6: $375 \times 8 = 3,000$
 - Band 8: $375 \times 32 = 12,000$
4. Subinterval duration: ~14 minutes (maximum)
(longest possible contact period duration - worst case)
5. Scene duration: ~ 24 seconds
6. Number of scenes per subinterval: ~ 35
(longest possible contact period with a single subinterval)
7. ETM+ scans per subinterval:
 - Nominal: $335 \times 35 = 11,725$
8. Scan data lines (maximum) per subinterval (scans do not overlap):
 - Bands 1 - 5 and 7: $5,360 \times 35 = 187,600$
 - Band 6: $2,680 \times 35 = 93,800$
 - Band 8: $10,720 \times 35 = 375,200$
 - Band 8: $10,720 \times 35/4 = 93,800$ (1 of 4 file segments)
9. Active scan data line lengths (nominal):
 - Band 1 - 5 and 7: 6320 Bytes
 - Band 6: $6320/2 = 3160$ Bytes
 - Band 8: $6320 \times 2 = 12,640$ Bytes
10. LHS margins: bumper wear + extra/error
 - Bands 1 - 5 and 7: $17 + 23 = 40$ Bytes
 - Band 6: $40/2 = 20$ Bytes (margin is half of Band 1 margin)
 - Band 8: $40 \times 2 = 80$ Bytes (margin is double of Band 2 margin)
11. RHS margins: alignment space + bumper wear + extra/error
 - Bands 1 - 5 and 7: $206 + 17 + 17 = 240$ Bytes
 - Band 6: $240/2 = 120$ Bytes (margin is half of Band 1 margin)
 - Band 8: $240 \times 2 = 480$ Bytes (margin is double of Band 1 margin)

12. Band data line lengths (maximum):
(nominal length + LHS margins + RHS margin)
- Band 1 - 5 and 7: $6,320 + 40 + 240 = 6,600$ Bytes
 - Band 6: $3,160 + 20 + 120 = 3,300$ Bytes (or $6,600/2 = 3,300$)
 - Band 8: $12,640 + 80 + 480 = 13,200$ Bytes (or $6,600 \times 2 = 13,200$)
13. Subinterval band data file volumes (maximum):
- Band 1 - 5 and 7: $187,600 \times 6,600 = \sim 1.238$ GB
 - Band 6: $93,800 \times 3,300 = \sim 0.310$ GB
 - Band 8: $375,200 \times 13,200 = \sim 4.953$ GB (all 4 segments)
 - Band 8 Segment: $4.953 / 4 = \sim 1.238$ GB (one segment)

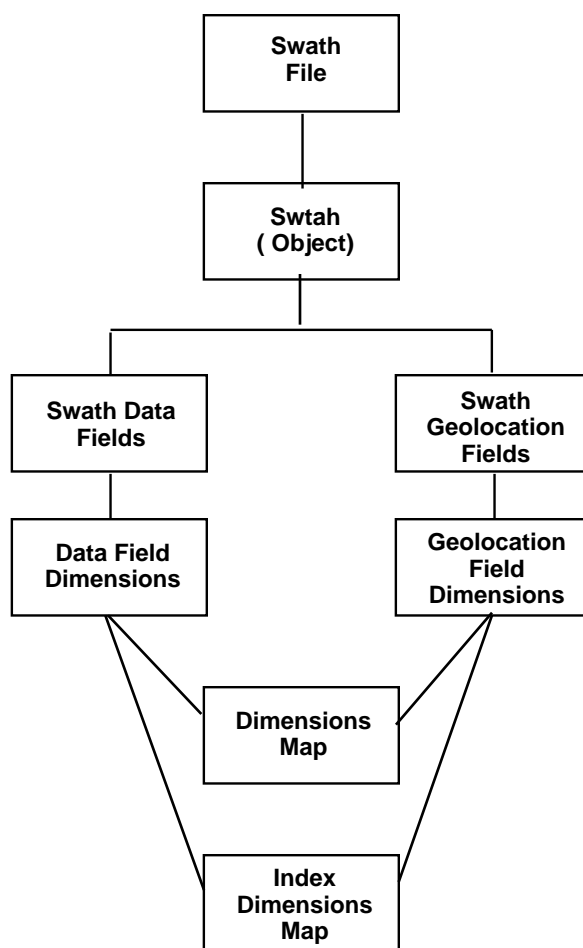
**Figure 4-1: Band Data File - HDF-EOS Swath Structure**



Figure 4-2: Band Data File - ECS-HDF Swath Overview

Table 4-2: Band Data File - Swath Definition Parameters

Swath Definition Parameter	Number Type and (Size)	Value, Format, Range and Unit	Parameter Description / Remarks
file_name	char8 (22)	= L7XssfnYYDOYHHuuv.xxx where xxx indicates the band file identification details.	See Section 3.4 for complete details on the LPS file naming convention.
swath_name	char8 (6)	<p>= Band_Swath_Bis where "Band_Swath_" identifies a L7 band data HDF-EOS swath object. One band swath object is produced for each ETM+ band, except Band 8. Up to four band swath objects, one each for a band 8 segment, may be produced by LPS. Each band swath object is stored in a single band swath file.</p> <p>Bis identifies ETM+ Format 1 and Format 2 band (image) data source bands as follows:</p> <p>Bi = B1 - B8 for ETM+ Bands 1 - 8</p> <p>s = 0 for single segment swaths for Bands 1 - 5 and 7</p> <p>s = "L" for the Format 1 low gain Band 6 data swath</p> <p>s = "H" for the Format 2 high gain Band 6 data swath</p> <p>s = 1 - 4 for Band 8 segments (swaths).</p>	<p>Defined in accordance the xxx = "Bis" subset in the LPS file naming convention. See Section 3.4 for deriving the band file identification (Bis) details from the band data.</p> <p>Format 1 band data swath names:</p> <p>= Band_Swath_B10 = Band_Swath_B20 = Band_Swath_B30 = Band_Swath_B40 = Band_Swath_B50 = Band_Swath_B6L</p> <p>Format 2 band data swath names:</p> <p>= Band_Swath_B6H = Band_Swath_B70 = Band_Swath_B81 = Band_Swath_B82 = Band_Swath_B83 = Band_Swath_B84</p> <p>One band swath file contains one swath object.</p>

Table 4-3: Band Data File - HDF Swath Attributes

Attribute Name	Number Type (ntype)	Count	Attribute Values	Remarks
detector_count	int8	1	= 16 for Bands 1-5 and 7, = 8 for Band 6, and = 32 for Band 8	
scene_count	int8	1	= 1- N (full and/or partial) where N is determined by LPS during Level 0R processing.	A maximum of 35 scenes are expected in a 14 minute subinterval.

Table 4-4: Band Data File - HDF Swath Data Field Dimensions

Data Field Name	Number Type	Cross-Track Dimension Name and Size	Track Dimension Name and Size	Merge Code
band_detector_data	uint8	Name: PixelsXTrack Size: = 6600 for bands 1-5 and 7 = 3300 for bands 6 = 13200 for each Band 8 segment	Name: ScanLineTrack Size: 1 - 13125 x detector_count or = 1 - 210000 for bands 1-5 & 7 = 1 - 105000 for bands 6 = 1 - 420000 for Band 8 (1 - 105000 scan lines per Band 8 file segment)	= HDFE_NOMERGE (0) (no merge) There is only one swath in a file.

Table 4-5: Band Data File - HDF Swath Geolocation Fields

Geolocation Field Name	Number Type	Count	Value	Remarks
scan_timecode	char8	25	<p>Scan line time of the form 'YYYY:ddd:hh:mm:ss.tttttt' where</p> <p>YYYY: Four-digit Julian year ddd: Day (01 through 367**) hh: hours (00 through 23) mm: minutes (00 through 59) ss: seconds (00 through 59) tttttt: fractional seconds (0 - 9999375 or 0 - 15/16 milliseconds)</p> <p>** For cases when active imaging occurs at the end of a leap year.</p>	The ETM+ scan start time extracted from the timecode minor frames of the ETM+ major frame data reported in this record. A computed scan start time is provided if a valid time is not available from the ETM+ time code minor frames.
scan_time	float64	1	<p>The ETM+ scan time in seconds since midnight on January 1, 1993 (93:001:00:00:00.0000000). (TBR - LPS software CCR to provide time conversion)</p>	<p>The scan_time is obtained by converting the scan_timecode (see below) to seconds.</p> <p>The ECS Project/HDF requires scan times in the seconds format to search data archives.</p>
scan_no	uint16	1	<p>scan_no = 1 - 13125</p> <p>The maximum scan count is based on a subinterval duration of 14 minutes for 35 scenes, each consisting of 375 (355+20) scans.</p>	Provides a sequence counter for ETM+ scans (major frames) contained in a subinterval. The ETM+ scan counter is incremented by one for each new scan, real or flywheeled, added to the subinterval file.
scan_data_line_no	uint32	1	<p>scan_data_line_no = SSSSSS</p> <p>where SSSSSS = 1 - 210000 for Bands 1-5 and 7 = 1 - 105000 for Band 6 = 1 - 420000 for Band 8</p> <p>Note: The Band 8 scan-line count is not reset between segments (1 - 4).</p>	<p>The scan line counter is incremented for each Band-Detector line added to the subinterval band file. This counter is incremented once per ETM+ scan for Bands 1 - 5 and 7, once every two ETM+ scans for Band 6, and twice for each ETM+ scan for Band 8.</p> <p>The maximum line counts are shown for a 14-minute subinterval (35 scenes).</p>

Geolocation Field Name	Number Type	Count	Value	Remarks
scan_dir	char8	1	Scan direction character 'F' = Forward scan 'R' = Reverse scan	The ETM+ scan direction information interpolated from the Scan Line Data (SLD) minor frames of the first valid ETM+ major frame reported in this file. A valid ETM+ major frame has no errors.
detector_id	int8	1	where the detector_id is in the range: = 1-16 for Bands 1 - 5 and 7 = 1 - 8 detectors for Band 6 = 1 - 32 for Band 8	Each scan line in a band file consists of pixel data (bytes) from a single detector of a single band (see Figure 4-2). Each detector, chosen in an incrementing ID order, is used once during each scan for generating a scan line.
scan_data_line_offset_rhs	int8	1	= 1 - 240 bytes for Bands 1 -5 and 7 = 1 - 120 bytes for Bands 6L (Format 1) and 6H (Format 2) = 1 - 480 bytes for Band 8 The scan line data may be shifted to right in the band data buffer after an integer-pixel alignment.	The scan line data in each record of the band file is initially written with a predetermined size of byte offset on the left and right of the designated scan line data area. During integer-pixel alignment, these offsets provide moving in space (to avoid data loss) for the right- shifted band-detector data. After a integer-pixel alignment, this field indicates the resulting start and stop bytes/pixel positions for a scan lines. This offset also accommodates scan line length growths due to ETM+ scanner bumper wear. (See Figure 4-2)
scan_data_line_offset_lhs	int8	1	= 1 - 40 bytes The scan line data may be shifted to left in the band data buffer after an integer-pixel alignment.	Note: The left-hand-side offset is not as significant as the right-hand-side margin. It can accommodate scan line length growths due to ETM+ scanner bumper wear. (See Figure 4-2)
scene_center_latitude	float32	1	= -90.0 to +90.0 degrees A positive (+) value defines a latitude to the North A negative (-) value defines a latitude to the South	WRS Scene Center Latitude - LPS calculated

Geolocation Field Name	Number Type	Count	Value	Remarks
scene_center_ longitude	float32	1	= -180.0 to +180.0 degrees A positive value (+) defines a longitude to the East A negative (-) defines a longitude to the West	WRS Scene Center Longitude - LPS calculated
corner_latitude	float32	4	= -90.0 to +90.0 degrees A positive (+) value defines a latitude to the North A negative (-) value defines a latitude to the South	WRS Scene Corner Latitude - LPS calculated
corner_longitude	float32	4	= -180.0 to +180.0 degrees A positive value (+) defines a longitude to the East A negative (-) defines a longitude to the West	WRS Scene Corner Longitude - LPS calculated

Table 4-6: Band Data File - HDF Swath Geolocation Filed Dimensions

Geolocation Field Name	Number Type	Cross-Track Dimension Name and Size	Track Dimension Name and Size	Merge Code
scan_timecode	char8	None	Name: TimecodeTrack Size: 1 - 13125	= HDFE_ AUTOMERGE (1) (OK to merge fields with shared dimensions and/or data type)
scan_time	float64	None	Name: TimeTrack Size: 1 - 13125	= HDFE_ AUTOMERGE (1) (merge)
scan_no	uint16	None	Name: ScanTrack Size: 1 - 13125	= HDFE_ AUTOMERGE (1) (merge)
scan_data_line_no	uint32	None	Name: ScanLineNoTrack Size: 1 - 13125 x detector_count (See Table 4-3)	= HDFE_ AUTOMERGE (1) (merge)
scan_dir	char8	None	Name: ScanDirTrack Size: 1 - 13125	= HDFE_ AUTOMERGE (1) (merge)
detector_id	uint8	None	Name: DetectorIdTrack Size: 1 - 13125 x detector_count (See Table 4-3)	= HDFE_ AUTOMERGE (1) (merge)
scan_data_line_offset_ rhs	int8	Name: RhsOffsetXTrack Size = 1 - 240 for Bands 1 -5 and 7) = 1 - 120 for Band 6L and 6H) = 1 - 480 for Band 8	Name: RhsOffsetTrack Size: 1 - 13125 x detector_count (See Table 4-3)	= HDFE_ AUTOMERGE (1) (merge)
scan_data_line_offset_ lhs	int8	Name: LhsOffsetXTrack Size = 1 - 40 for Bands 1 -5 and 7) = 1 - 20 for Band 6L and 6H) = 1 -80 for Band 8	Name: LhsOffsetTrack Size: 1 - 13125 x detector_count (See Table 4-3)	= HDFE_ AUTOMERGE (1) (merge)

Geolocation Field Name	Number Type	Cross-Track Dimension Name and Size	Track Dimension Name and Size	Merge Code
scene_center_latitude	float32	None	Name: CenterTrack Size: 1 - scene_count (See Table 4-3)	= HDFE_ AUTOMERGE (1) (merge)
scene_center_longitude	float32	None	Name: CenterTrack Size: 1 - scene_count	= HDFE_ AUTOMERGE (1) (merge)
corner_latitude	float32	Name: CornerXTrack Size: 2	Name: CornerTrack Size: 1 - scene_count x 4	= HDFE_ AUTOMERGE (1) (merge)
corner_longitude	float32	Name: CornerXTrack Size: 2	Name: CornerTrack Size: 1 - scene_count x 4	= HDFE_ AUTOMERGE (1) (merge)

Table 4-7: Band Data File - HDF Swath Dimension Map

Geolocation Dimension Name	Data Dimension Name	Offset	Increment
TimecodeTrack	ScanLineTrack	= 0 The timecode starts with the first scan line.	= detector_count The timecode repeats at detector count intervals.
TimeTrack	ScanLineTrack	= 0	= detector_count
ScanTrack	ScanLineTrack	= 0	= detector_count
ScanLineNoTrack	ScanLineTrack	= 0	= 1
ScanDirTrack	ScanLineTrack	= 0	= detector_count
DetectorIdTrack	ScanLineTrack	= 0 The detector Id starts with the first scan line.	= 1 The detector ID repeats on a scan line basis.
LhsOffsetTrack	ScanLineTrack	= 0 The left-hand side offset starts with the first scan line.	= 1 A left-hand side offset is present for each scan line.
RhsOffsetTrack	ScanLineTrack	= 0	= 1
LhsOffsetXTrack	PixelXTtrack	= 0 - 40 The left-hand-side offset start location.	= 1 The data gap data is written at one pixel increments.
RhsOffsetXTrack	PixelXTtrack	= (6600-270) - 6600 = 6330 - 6600 The right-hand-side offset start location.	= 1 The data gap data is written at one pixel increments.

Table 4-8: Band Data File - HDF Swath Index Dimension Map

Geolocation Dimension Name	Data Dimension Name	Index (array size) (Indices of Data Dimension)	Remarks
CenterTrack	ScanLineTrack	CenterScanLine (scene_count) (Ref. Table 4-3)	Each scene center is associated with a unique/single scan line in a band file.
CornerTrack	ScanLineTrack	CornerScanLine (scene_count x 4)	All four scene corners (respective latitudes and longitudes) are associated with specific scan lines in the band file to identify their upper and lower corner positions.
CornerXTrack	PixelsXTrack	CornerScanPixels (2)	All four scene corners (respective latitudes and longitudes) are associated with pixels along the scan lines to identify their left-hand side and right-hand side corner positions.

4.1.2 MSCD File Format (HDF Vdata)

4.1.2.1 MSCD File Description

The LPS generates an MSCD file for each ETM+ format: Format 1 and Format 2. The LPS uses the HDF Vdata structure for generating an MSCD file. Table 4-9 defines the Vdata structure for the LPS MSCD file.

The MSCD file is organized by ETM+ scans. The spacecraft time associated with each ETM+ scan is provided in seconds since January 1, 1993 (**TBR**). This spacecraft time is also provided in the Julian day of year and time format.

Table 4-9: MSCD File - HDF Vdata Definition and Fields

Vdata Name: L7XsssfYDDOYHHuuv.xxx		Where: xxx = "MSD" for the MSCD file Complete details on the LPS file naming convention are specified in Section 3.4.		
Vdata Class: LPS_MSCD				
Interlace Type: FULL_INTERLACE				
Bytes Per Logical Record: 60 (TBR)				
Number of Records: One record per ETM+ scan (major frame)				
Field Name	Number Type	Order	Description	Remarks
scan_no	int32	1	Subinterval scan counter = N - 11725 where, N is an LPS operator selectable number, and the maximum scan count of 11725 is based on a maximum subinterval duration of 14 minutes for 35 scenes, each consisting of 335 scans.	Provides a sequence counter for the ETM+ scans (major frames) contained in a subinterval. The ETM+ scan counter is incremented by one for each new scan, real or flywheeled, added to the subinterval file. The minimum number of scans to be included in a subinterval is an LPS operator-selectable parameter. An LPS-produced subinterval can contain data for a partial WRS scene (less than 335 scans).
scan_time	float64	1	The ETM+ scan time in seconds since midnight on January 1 (93:001:00:00:00.0000000). (TBR - LPS software CCR to provide time conversion)	The scan_time is obtained by converting the scan_timecode (see below) to seconds. The ECS Project/HDF requires scan times in the seconds format to search data archives.

Field Name	Number Type	Order	Description	Remarks
scan_timecode	char8	25	<p>Scan line time of the form 'YYYY:ddd:hh:mm:ss.tttttt' where</p> <p>YYYY: Four-digit Julian year ddd: Day (01 through 367**) hh: hours (00 through 23) mm: minutes (00 through 59) ss: seconds (00 through 59) tttttt: fractional seconds (0 - 9999375 or 0 - 15/16 milliseconds)</p> <p>** For cases when active imaging occurs at the end of a leap year.</p>	The ETM+ scan start time extracted from the timecode minor frames of the ETM+ major frame data reported in this record. A computed scan start time is provided if a valid time is not available from the ETM+ time code minor frames.
eol_flag	uint8	1	<p>Flag for valid end of line (EOL) pattern code:</p> <p>0 = valid pattern in expected location (minor frame location) 1 = flywheeled EOL - erroneous pattern in expected location 2 = valid pattern found outside the expected range</p>	
eol_location	uint16		<p>Minor frame location (number in the range: 6318 - 6323 (decimal) (TBR))</p> <p>The minor frame location (number) within a major frame that contains the first word of the ETM+ End of Line (EOL) code. The eol_flag reports eol_location errors.</p>	The EOL is expected to occur within the vicinity of minor frame number 6320 in each ETM+ major frame. The EOL code consists of two adjacent minor frames. The EOL indicates an end of the active scan period and start of a calibration data period past the scan line data (SLD) words.
scan_dir_vote	uint8	1	<p>Scan direction majority vote quality</p> <p>0 = all bits in all scan direction word groups are equal 1 = at least one bit in the scan direction word groups is not equal to the other bits</p>	

Field Name	Number Type	Order	Description	Remarks
scan_dir	char8	1	Scan direction character 'F' = Forward scan 'R' = Reverse scan	The ETM+ scan direction information interpolated from the Scan Line Data (SLD) minor frames of the first valid ETM+ major frame reported in this file. A valid ETM+ major frame has no errors.
fhs_vote	uint8	1	FHS error majority vote quality 0 = all bits in each FHS Error word group are equal 1 = at least one bit in at least one FHS Error word group is not equal to the other bits in the group	
fhs_err	int16	1	First half scan error count: - 2048 to + 2047 (decimal) This is a 12-bit number provided in an int16 field. See the Landsat 7 DFCB (Applicable Document 2.1.4) for additional details.	The first half scan error (FHS ERR) interpolated from the Scan Line Data (SLD) minor frames of the first valid ETM+ major frame reported in this file. A valid ETM+ major frame has no errors. The FHS ERR value reported here is for the previous scan (ETM+ major frame).
shs_vote	uint8	1	SHS error majority vote quality 0 = all bits in each SHS Error word group are equal 1 = at least one bit in at least one SHS Error word group is not equal to the other bits in the group	
shs_err	int16	1	Second half scan error count: - 2048 to + 2047 (decimal) This is a 12-bit number provided in an int16 field. See the Landsat 7 DFCB (Applicable Document 2.1.4) for additional details.	The second half scan error (SHS ERR) interpolated from the Scan Line Data (SLD) field of the first valid ETM+ major frame reported in this file. A valid ETM+ major frame has no errors. The SHS ERR value reported here is for the previous scan (ETM+ major frame).

Field Name	Number Type	Order	Description	Remarks
gain_status	char8	6	'gggggg' where g's indicate positions 123456 for Format 1 data OR 678\$\$\$ for Format 2 data where \$\$\$ indicates three blank spaces. g = L in a band position indicates a low gain g = H in a band position indicates a high gain.	For each band, the gain status is defined by the gain state value contained in the "PCD/Status Data" field of the first error-free VCDU of the ETM+ major frame.
gain_change	char8	6	'gggggg' where g's indicate positions 123456 for Format 1 data OR 678\$\$\$ for Format 2 data where \$\$\$ indicates three blank spaces. g = 0 in a band position indicates no gain change, i.e., the gain_status of the previous scan is equal to the gain_status of this scan. g = 1 in a band position indicates a gain change, i.e., the gain_status of the previous scan is not equal to the gain_status of this scan.	The first scan of the Vdata has gain_change = 0.
mux_assembly_id	unit8	1	= 0 - 7 for Landsat 7 multiplexer assemblies 0 - 7 (TBR)	Identifies the Landsat 7 spacecraft on-board multiplexer used in the ETM+ data flow for this major frame. The multiplexer status is obtained from the first error free CADU/VCDU used in the construction of this major frame.
cal_shutter_status	uint8	1	0 = CAL shutter 1 = Backup shutter (TBR)	Identifies the Landsat 7 spacecraft on-board CAL shutter status during the ETM+ data flow for this major frame. The CAL shutter status is obtained from the first error free CADU/VCDU used in the construction of this major frame.

Field Name	Number Type	Order	Description	Remarks
cadu_sync	uint8	1	Flag to indicate loss of CADU sync anywhere within the scan: 0 = no loss 1 = sync loss	
scan_sync	uint8	1	Flag for valid sync for current major frame: 0 = valid sync 1 = flywheeled sync	Valid sync: The line sync code was correctly found and decoded as specified in the Landsat 7 DFCB. Flywheeled sync: The line sync code minor frame could not be correctly found and/or decoded as specified in the Landsat 7 DFCB. The presence of the Line Sync Code is "deduced" from correctly finding/decoding the Time Code minor frames of an ETM+ major frame.
timecode_flag	uint8	1	Valid timecode flag: 0 = valid timecode 1 = computed timecode	
minf_faults	char8	1	An index (hexadecimal 0 through D) representing the number of minor frame faults (m) in the range: '0' = no faulty minor frames '1' = 1 m 2 '2' = 3 m 4 '3' = 5 m 8 '4' = 9 m 16 '5' = 17 m 32 '6' = 33 m 64 '7' = 65 m 128 '8' = 129 m 256 '9' = 257 m 512 'A' = 513 m 1024 'B' = 1025 m 2048 'C' = 2049 m 4096 'D' = 4097 m NNNN 'E' = Not Applicable 'F' = Not Applicable NNNN is an LPS operator-selectable parameter for the maximum number of minor frames possible in an ETM+ major frame.	This quality index is computed by LPS on a major frame basis. This index provides a quick-look assessment on the number of faulty minor frames contained in a major frame. Faulty minor frames contain fill data or are extracted from VCDUs containing uncorrected BCH errors. Lower quality indices indicate better quality major frames. Without bumper wear, there is a nominal of 7423** minor frames in an ETM+ major frame. Accounting for 17 (TBR) minor frames of bumper wear on each end of the scanner, there could be a maximum of 7457 (TBR) minor frames in an ETM+ major frame. ** Source: Landsat 7 DFCB (Applicable Document 2.1.4)

Field Name	Number Type	Order	Description	Remarks
cadus/vcdus_received	uint16	1	= 0 - 999 (decimal) Approximately 643 VCDUs are required to build one ETM+ major frame (consisting of approximately 7423 minor frames).	The total number of VCDUs used in the construction of this ETM+ major frame.
fly_wheel_cadus	uint16	1	= 0 - 999	The total number of flywheel CADUs/VCDUs in this ETM+ major frame.
bit_slip_cadus	uint16	1	= 0 - 999	The total number of CADUs/VCDUs detected with bit slip errors in this ETM+ major frame.
r-s_err_vcdus		1	= 0 - 999	The total number of VCDUs with Reed-Solomon error used in the construction of this ETM+ major frame.
bch_corrected_vcdus	uint16	1	= 0 - 999	The total number of VCDUs, containing corrected BCH errors, in this major frame.
bch_uncorrected_vcdus	uint16	1	= 0 - 999	The total number of VCDUs, containing uncorrected BCH errors, in this major frame.
entirely_filled_scan	uint8	1	0 = no fill data used in this scan 1 = entirely filled scan	This flag indicates if any predetermined fill data was used in the construction of this ETM+ scan (major frame). There are a nominal for 7423 minor frames in a scan.
partially_filled_scan	uint16	1	0 - 7500	The total number of filled minor frames in this ETM+ major.

Note: ASCII values are enclosed in single quotes (e.g., '1' = ASCII one)

4.1.3 PCD File Format (HDF Vdata)

4.1.3.1 PCD File Description

This section presents a detailed format of the LPS output PCD file. The LPS generates one each PCD file for the ETM+ Format 1 and Format 2 data during Level 0R processing. The PCD items contained in this file are converted to the engineering units (EUs) identified in the Landsat 7 DFCB. The LPS uses the HDF Vdata structure for producing LPS output PCD files. Table 4-10 defines the HDF Vdata structure for the LPS output file containing PCD data engineering units for the ETM+ Format 1 and Format 2 data.

The LPS output PCD file uses a single/common Vdata structure for reporting each of the major frames received in a PCD cycle. Each PCD major frame is uniquely identified by its associated spacecraft time. This spacecraft time, which is extracted and/or computed from the raw input PCD data, is provided in two different engineering units. The first engineering unit presents the spacecraft time in the Julian day of year and time format. The second engineering unit presents the spacecraft time of a PCD major frame time in seconds since January 1, 1993 (**TBR**) with double precision floating-point (float64) accuracy. The time-in-seconds engineering units format is supported by the LPS to comply to the HDF Vdata type restrictions.

Table 4-10: PCD File - HDF Vdata Definition and Fields

Vdata Name: L7XsssfYDDOYHHuuv.xxx		where xxx = "PCD" for the PCD file Complete details on the LPS file-naming convention are specified in Section 3.4.		
Vdata Class: LPS_PCD				
Interlace Type: FULL_INTERLACE				
Bytes Per Logical Record: (TBD)				
Number of Records: One record per PCD major frame (4.096 spacecraft seconds)				
Field Name	Number Type	Order	Description	Remarks
<i>PCD Major Frame Identification Data</i> <i>(not a Vdata table attribute/entry)</i>	-	-	<i>A new PCD major frame is inserted in the PCD file every 4.096 seconds of the spacecraft time (or every 40.960 seconds during Level 0R processing at 7.5 Mbps).</i> <i>All PCD data are presented in their respective engineering units (EUs) as noted in the Landsat 7 DFCB.</i>	<i>One full PCD major frame consisting of a maximum of 128 minor frames, each containing 128 8-bit words (total 16,384 bytes) is included in each PCD record. No PCD bytes, valid or not, are dropped by LPS. See Landsat 7 DFCB for details on PCD words/bytes. A summary of PCD locations by PCD cycle/major frame/word is provided in appendix A in this DFCB.</i>
cycle_count	uint8	1	PCD cycle number (00-99) There could be approximately 52 PCD cycles in a 14-minute subinterval.	The PCD Cycle number associated with PCD major frame reported in this record of the PCD file. A PCD cycle consists of 4 consecutive PCD major frames. This number is incremented by 1 for each PCD major frame (0) (identified by spacecraft ID and timecode in words 72 of minor frames 96-102) received in the ETM+ subinterval.

Field Name	Number Type	Order	Description	Remarks
majf_count	uint8	1	PCD major frame counter value (001-255) There could be approximately 206 PCD major frames in a 14-minute subinterval (PCD major frame time = 4.096 seconds).	The major frame counter value of the PCD major frame reported in this record of the subinterval PCD file. The PCD major frame number is incremented by one for each new PCD major frame added to this file.
majf_id	uint8	1	PCD major frame ID (0-3)	The PCD major frame ID is determined by the information contained in word 72, minor frames 96-103 of each PCD major frame contained in a PCD cycle. PCD major frame (0) is identified by the presence of spacecraft ID and timecode information in the word 72 locations. Other PCD major frames are identified by their ID numbers (1-3).
majf_time	float64	1	PCD major frame time in seconds since January 1, 1993 (TBR)	This time is the PCD major frame time (majf_timecode; see next entry) converted by LPS to seconds since January 1, 1993.
scan_timecode	char8	25	Scan line time of the form 'YYYY:ddd:hh:mm:ss.tttttt' where YYYY: Four-digit Julian year ddd = Day (01 through 367**) hh = hours (00 - 23) mm = minutes (00 - 59) ss = seconds (00 - 59) tttttt: fractional seconds (0 - 9999375 or 0 - 15/16 milliseconds) ** For cases when active imaging occurs at the end of a leap year.	For PCD major frame (0), the spacecraft time is extracted from PCD Major frame (0) of a PCD cycle. For PCD major frames 1-3, the spacecraft timecode is interpolated using the spacecraft time received for PCD major frame (0) of the associated PCD cycle.

Field Name	Number Type	Order	Description	Remarks
<i>Selected PCD Items</i> <i>(not a Vdata table attribute/entry)</i>	-	-		
bands_present	char8	9	<p>A common format for indicating the bands present in an ETM+ format.</p> <p>= 123456\$\$\$ for all bands present in Format 1 data, or indicator, a 123456 OR \$\$\$\$\$678 for all bands present in Format 2 data.</p> <p>The \$ sign indicates a blank spaces. A "-" indicates a missing band (e.g., '123-56' or '6-8\$\$\$').</p>	This information is extracted from the third PCD major frame, minor frame 32, word 72, bits 0 - 6.
fac_flag	uint8	1	<p>Full Aperture Calibration door flag: (0 = no activity, 1 = activity)</p>	ETM+ Calibration Activity Status. This status is interpolated from "serial word P" of the third PCD major frame, minor frame 83, word 72, bits 2 and 3.
<i>PCD Major Frame Quality and Accounting Data</i> <i>(not a Vdata table attribute/entry)</i>	-	-		<i>To maintain consistency with the Landsat 7 Wideband DFCB, the smallest PCD granule is called a "word". A PCD word = an 8-bit byte.</i>
unpacked_pcd_words	uint32	1	Count of unpacked PCD words received for this PCD major frame.	Possible range: 0 - 147,497 unpacked PCD words received for this major frame.
unpacked_words_missing	uint32	1	Count of unpacked PCD words identified as missing due to missing VCDUs. Some received PCD major frames may contain LPS filled data.	Possible range: 0 - 147,497 unpacked PCD words missing for this major frame.

Field Name	Number Type	Order	Description	Remarks
vote_errors	uint16	1	Count of (packed) PCD major frame words found to contain voting errors during packing a PCD word/minor frame. Some PCD major frame words may contain erroneous or LPS filled data.	Possible range = 0 - 16384 packed words in a PCD major frame.
minf_sync_errors	uint8	1	Count of PCD minor frames received with sync errors in this major frame. Some PCD words may be lost and filled due to minor frame sync errors.	Possible range: 0 - 128 (minor frames per major frame)
minf_id_errors	uint8	1	Count of PCD minor frames received with incorrect minor frame IDs (counter values). Corrected IDs are filled in.	Possible range: 0 - 128 (minor frames per major frame)
minf_filled	uint8	1	Count of PCD minor frames found with erroneous data in PCD words and filled by LPS with a known value (TBR).	Possible range: 0 - 128 (minor frames per major frame)
majf_flag	uint8	1	PCD major frame flag where 0 = valid major frame ID 1 = incorrect major frame ID; Used for major frames (1), (2) and (3) only, If in error, the PCD major frame ID is corrected by LPS.	Indicates the quality of the PCD major frame ID found in word 72, minor frames 96-103 of PCD major frames (1), (2) and (3). PCD major frame (0) contains the timecode flag (see below).
timecode_flag	uint8	1	Valid PCD timecode flag, where 0 = valid timecode and spacecraft ID 1 = computed timecode 2 = corrected spacecraft ID 3 = flags 1 and 2 combined.	Indicates the quality of the spacecraft ID and timecode data contained in word 72, minor frames 96-103, of PCD major frames(0).

Field Name	Number Type	Order	Description	Remarks
PCD Major Frame Data (not a Vdata table attribute/entry)				
spacecraft_id	char8	1	spacecraft_id = "7"	The Landsat 7 spacecraft ID is determined from bytes 0-3 of PCD timecode word 96 located in major frame (0) of each PCD cycle. For the remaining three major frames in a PCD cycle, this spacecraft id is copied for each major frame. The spacecraft ID is also forced to "7" when an erroneous ID is read. The spacecraft ID error is noted in the s/c_id_pcd field.
sv_clk_last_u/d_time	float64	1	sv_clk_last_u/d_time = 0 - 31,622,400 seconds from midnight of the first day of the current year. This time is presented as a double precision floating point number in HDF to accommodate the 48 bit extended precision floating point value/sample received in the PCD data.	See L7 DFCB Section 3.2.7.4.6 for details on the SV clock last update time.
time_drift_bias_c0	int16	1	Spacecraft time drift bias (C0) = -15 to +15 milliseconds	See L7 DFCB Section 3.2.7.4.7 for details on the SV (spacecraft) time drift characterization data.
time_drift_rate_c1	int16	1	Spacecraft clock drift rate (C1) = +/- TBD milliseconds/day	See above
time_drift_acceln_c2	int16	1	Spacecraft clock drift acceleration (C2) = +/- TBD milliseconds/day ²	See above

Field Name	Number Type	Order	Description	Remarks
ETM+ TLM @ 4.096 seconds rate (not a Vdata table attribute/entry)	-	-	Repeat the following PCD values for each PCD major frame. If a major frame does not contain the required PCD value, fill these with all ones (FF in hexadecimal).	The following PCD values should be copied in the same format as found in their respective PCD words/minor frames in a PCD major frame.
black_body_temp_iso	uint8	1	Black Body Temperature (Isolated)	See above
cfpa_heater_current	uint8	1	CFPA Heater Current	See above
cal_shutr_flag_temp	uint8	1	Calibration Shutter Flag Temperature	See above
b/u_shutr_flag temp	uint8	1	Backup Shutter Flag Temperature	See above
black_body_temp_con	uint8	1	Black Body Temperature (Control)	See above
baffle_temp_heater	uint8	1	Baffle Temperature (Heater)	See above
cfpa_control_temp	uint8	1	CFPA Control Temperature	See above
pdf_a/d_ground_ref	uint8	1	PDF A/D Ground Reference	See above
ETM+ TLM @16.384 seconds Rate (not a Vdata table attribute/entry)	-	-	Repeat the following PCD values for each PCD major frame. If a major frame does not contain the required PCD value, fill these with all ones (FF in hexadecimal).	The following PCD values should be copied in the same format as found in their respective PCD words/minor frames in a PCD major frame.
serial_word_a	uint8	1	Serial Word "A"	See above
serial_word_b	uint8	1	Serial Word "B"	See above
serial_word_c	uint8	1	Serial Word "C"	See above
serial_word_d	uint8	1	Serial Word "D"	See above
serial_word_e	uint8	1	Serial Word "E"	See above
serial_word_f	uint8	1	Serial Word "F"	See above
serial_word_g	uint8	1	Serial Word "G"	See above
serial_word_h	uint8	1	Serial Word "H"	See above

Field Name	Number Type	Order	Description	Remarks
serial_word_i	uint8	1	Serial Word "I"	See above
serial_word_j	uint8	1	Serial Word "J"	See above
serial_word_k	uint8	1	Serial Word "K"	See above
serial word_l	uint8	1	Serial Word "L"	See above
serial word "m"	uint8	1	Serial Word "M"	See above
serial word "n"	uint8	1	Serial Word "N"	See above
serial_word "p"	uint8	1	Serial Word "P"	See above
serial_word_q	uint8	1	Serial Word "Q"	See above
serial_word_r	uint8	1	Serial Word "R"	See above
serial_word_s	uint8	1	Serial Word "S"	See above
mux1_elec_temp	uint8	1	Mux 1 Electronics Temperature	See above
mux1_ps_temp	uint8	1	Mux 1 Power Supply Temperature	See above
mux2_elec_temp	uint8	1	Mux 2 Electronics Temperature	See above
mux2_ps_temp	uint8	1	Mux 2 Power Supply Temperature	See above
acs_cpu_mode	uint8	1	ACS CPU Mode	See above
etm_tlm_mnf_16_30	uint8	15	ETM TLM MF(2), mfs(16-30)	See above
etm_tlm_mnf_40_49	uint8	10	ETM TLM MF(2) mfs(40-49)	See above
etm+_on_time	float64	1	<p>Time ETM+ was last on: etm+_on_time = 0 - 31,622,400 seconds from midnight of the first day of the current year.</p> <p>Reported for each PCD major frame (0) record. If a PCD major frame (1, 2, or 3) does not contain the required PCD value, use all ones as the fill value.</p>	<p>See L7 DFCB Sections 3.2.7.4.6 and 3.2.7.4.16 for details on this time.</p> <p>Reported as an HDF double precision floating point number to accommodate the 48 bit extended precision floating point value/sample received in major frame (0) of a PCD cycle.</p>

Field Name	Number Type	Order	Description	Remarks
etm+_off_time	float64	1	Time ETM+ was last off: See above for related description.	See above
<i>Ephemeris Data</i> <i>(not a Vdata table attribute/entry)</i>		-	<i>The ephemeris data, consisting of the position and velocity components, is available on a PCD major frame basis.</i>	<i>See L7 DFCB Section 3.2.7.4.8 for details on the ephemeris data.</i> <i>Note: The ephemeris data source minor frame locations change for odd and even numbered major frames (0 - 3).</i>
ephem_position_x	float32	1	Position Range: +/- 8.3886 x 10 ⁶ meters	See above
ephem_position_y	float32	1	See above	See above
ephem_position_z	float32	1	See above	See above
ephem_velocity_x	float32	1	Velocity Range: +/- 8.0 meters/milliseconds	See above
ephem_velocity_y	float32	1	See above	See above
ephem_velocity_z	float32	1	See above	See above
Attitude Estimate <i>(not a Vdata table attribute/entry)</i>	-	-		See Landsat 7 DFCB Section 3.2.7.4.5 for word/minor frame locations of attitude data in PCD major frames.
attitude_est_epa1	float32	1	Attitude Euler parameter EPA1	Same as above
attitude_est_epa2	float32	1	Attitude Euler parameter EPA2	Same as above
attitude_est_epa3	float32	1	Attitude Euler parameter EPA3	Same as above
attitude_est_epa4	float32	1	Attitude Euler parameter EPA4	Same as above

Field Name	Number Type	Order	Description	Remarks
<i>Gyro (IMU Axes) Data</i> <i>(not a Vdata table attribute/entry)</i>	-	-	<i>Note: The following IMU axes (x,y,z) readings are repeated 64 times in each major frame. The IMU axes values are in arc-seconds of angular motion. A total of 256 readings (samples) are collected for each PCD cycle.</i>	<i>See L7 DFCB Section 3.2.7.4.3 for details on gyro data. Each IMU axes counter value is first constructed by concatenating the three bytes for each axis (e.g., x1, x2, and x3) and then converting to arc-seconds. For converting the IMU counter values to engineering units, each increment or decrement in the 24-bit counter value of an IMU axes represent a 0.061 arc-second change.</i>
imu_x_roll_nn	float32	1	Where imu_x_roll_nn = - 511705.088 to + 511705.027 arc-seconds, and; nn = 0-63 represents the sample number within the major frame.	See above
imu_y_pitch_nn	float32	1	See above	See above
imu_z_yaw_nn	float32	1	See above	See above
<i>Gyro Drift Data</i> <i>(not a Vdata table attribute/entry)</i>		-	<i>Note: The Gyro drift data is reported once per PCD cycle in major frame (0) only.</i>	<i>See L7 DFCB section 3.2.7.4.4 for details on the Gyro Drift data.</i>
theta-bx	float64	1	The units of gyro drift (rate) data for each axis are in radians/512 milliseconds.	The least significant bit weight of the theta value is adjusted to 2^{-47} before converting to engineering units.
theta-by	float64	1	See above	See above
theta-bz	float64	1	See above	See above

Field Name	Number Type	Order	Description	Remarks
Angular Displacement Sensor Data (ADS) (not a Vdata table attribute/entry)	-	-	<p>Note: The following fields are repeated for each minor frame in the PCD major frame. The minor frame ID (mnfm_mmm) is reported once for a total of 16 sets of ADS x,y,z values. The 16 sets of ADS x,y,z values are reported for each of the 128 minor frames in a PCD major frame.</p> <p>All ADS x,y,z measurements are converted to microradians and reported in ascending order of their source words and minor frames in a PCD major frame. All data is reported with single floating point precision.</p>	See L7 DFCB section 3.2.7.4.1 for details on ADS data. A total of 16 ADS measurements, each consisting of the x,y and z components, are received in a PCD minor frame.
mnfm_000	uint8	1	Minor frame counter or ID: 000	The PCD minor frame counter value/ID from word location 65 of each minor frame. There are 128 (IDs: 000 - 127) minor frames in a PCD major frame.
ads_xnn_mnfm_000	float32	1	ads measurement x01 received in minor frame 0	
ads_ynn_mnfm_000	float32	1	ads measurement y01 received in minor frame 0	
ads_z01_mnfm_000	float32	1	ads measurement z01 received in minor frame 0	
ads_x02_mnfm_000	float32	1	ads measurement x02 received in minor frame 0	
ads_y02_mnfm_000	float32	1	ads measurement y02 received in minor frame 0	
ads_z02_mnfm_000	float32	1	ads measurement z02 received in minor frame 0	
/	/	/	/	

Field Name	Number Type	Order	Description	Remarks
/	/	/	A total of 16 sets of ads x,y, and z components are reported for minor frame 000.	
/	/	/	/	
ads_x16_mnfm_000	float32	1	ads measurement x02 received in minor frame 000	
ads_y16_mnfm_000	float32	1	ads measurement y02 received in minor frame 000	
ads_z16_mnfm_000	float32	1	ads measurement z02 received in minor frame 000	
mnfm_001	uint8	1	Minor frame counter or ID: 001	
ads_x01_mnfm_001	float32	1	ads measurement x01 received in minor frame 001	
ads_y01_mnfm_001	float32	1	ads measurement y01 received in minor frame 001	
ads_z01_mnfm_001	float32	1	ads measurement z01 received in minor frame 001	
ads_x02_mnfm_001	float32	1	ads measurement x02 received in minor frame 001	
ads_y02_mnfm_001	float32	1	ads measurement y02 received in minor frame 001	
ads_z02_mnfm_001	float32	1	ads measurement z02 received in minor frame 001	
/	/	/	/	
/	/	/	A total of 16 sets of ads x,y, and z components are reported for minor frame 001.	
/	/	/	/	
ads_x16_mnfm_001	float32	1	ads measurement x02 received in minor frame 001	
ads_y16_mnfm_001	float32	1	ads measurement y02 received in minor frame 001	

Field Name	Number Type	Order	Description	Remarks
ads_z16_mnfm_001	float32	1	ads measurement z02 received in minor frame 001	
/	/	/		
/	/	/	A total of 16 sets of ads x, y, and z components are reported for each minor frame: 002 - 126	
/	/	/		
mnfm_127	uint8	1	Minor frame count: 0 - 127 within each major frame	
ads_x01_mnfm_127	float32	1	ads measurement x01 received in minor frame 127	
ads_y01_mnfm_127	float32	1	ads measurement y01 received in minor frame 127	
ads_z01_mnfm_127	float32	1	ads measurement z01 received in minor frame 127	
ads_x02_mnfm_127	float32	1	ads measurement x02 received in minor frame 127	
ads_y02_mnfm_127	float32	1	ads measurement y02 received in minor frame 127	
ads_z02_mnfm_127	float32	1	ads measurement z02 received in minor frame 127	
/	/	/		
/	/	/	A total of 16 sets of ads x, y, and z components are reported for minor frame 127	
/	/	/		
ads_x16_mnfm_127	float32	1	ads measurement x02 received in minor frame 127	
ads_y16_mnfm_127	float32	1	ads measurement y02 received in minor frame 127	
ads_z16_mnfm_127	float32	1	ads measurement z02 received in minor frame 127	

Field Name	Number Type	Order	Description	Remarks
ADS Temperatures <i>((not a Vdata table attribute/entry))</i>	-	-	Note - The ADS x,y,z and A/D electronic temperature values are reported on a major frame basis. All temperatures are reported in degrees Centigrade (°C).	See DFCB section 3.2.7.4.2 for details.
ads-x_temp_1	float32	1	See above	See above
ads-y_temp_2	float32	1	See above	See above
ads-z_temp_3	float32	1	See above	See above
ads-elec_a/d_temp_4	float32	1	See above	See above
PCD Quality and Accounting Data <i>((not a Vdata table attribute/entry))</i>			The following PCD quality data is produced by LPS and appended to each major frame record of the PCD file.	
s/c_id_err_pcd	char8	1	Spacecraft ID error in PCD: s/c_id_err_pcd = "n" for no errors "y" for errors detected in the spacecraft ID field	The error flag is true whenever the spacecraft ID is not equal to "7"
att_data_quality	char8	1	Attitude Data Point Quality: att_data_quality = "g" for a good data "r" for rejected data "m" for missing data	Determined and produced by LPS
ephem_data_quality	char8	1	Ephemeris Data Point Quality: ephem_data_quality = "g" for a good data "r" for rejected data "m" for missing data	Determined and produced by LPS

4.1.4 Calibration Data File Format (HDF-EOS Swath)

4.1.4.1 Calibration Data File - Swath Format Overview

The LPS uses the HDF-EOS Swath object structure for generating LPS calibration data files. An LPS calibration data file contains all HDF-EOS Swath objects required for all bands of the calibration data in an ETM+ Format 1 or Format 2 subinterval. A swath object for each band of the calibration data, present in an ETM+ format, is provided by LPS. The calibration data swath file for an ETM+ Format 1 subinterval consists of six swath objects, one each for Bands 1- 6. The calibration data swath file for an ETM+ Format 2 subinterval consists of three swath objects, one each for Bands 6 - 8. Figures 4-4 and 4-5 provide an overview of the HDF-EOS Swath structure for the LPS output Calibration file.

4.1.4.2 Calibration Data File Volume(s)

The following sizing assumptions are used to define the range of values included in the calibration file:

1. ETM+ Scans per Scene:
 - Nominal: 335 (Received WRS scene without scans overlap)
 - Maximum: 375 (Distribution WRS scene with scans overlap)
2. Scan Data Lines (Nominal, without scans overlap) per Scene:
 - Bands 1 - 5 and 7: $335 \times 16 = 5,360$
 - Band 6: $335 \times 8 = 2,680$
 - Band 8: $335 \times 32 = 10,720$
3. Scan/Cal Data Lines (Maximum with scans overlap) per Scene:
 - Bands 1 - 5 and 7: $375 \times 16 = 6,000$
 - Band 6: $375 \times 8 = 3,000$
 - Band 8: $375 \times 32 = 12,000$
4. Subinterval Duration: ~14 minutes (Maximum)
(Longest possible contact period duration - worst case)
5. Scene Duration: ~ 24 seconds
6. Number of Scenes (Maximum) per Subinterval: ~ 35
(For the longest possible contact period with a single subinterval)
7. ETM+ Scans per Subinterval (scans don't overlap):
Maximum: $335 \times 35 = 11,725$

8. Scan/Calibration Data Lines (Maximum) per Subinterval (scans do not overlap):
 - Bands 1 - 5 and 7: $5,360 \times 35 = 187,600$
 - Band 6: $2,680 \times 35 = 93,800$
 - Band 8: $10,720 \times 35 = 375,200$
9. Calibration Data Line Lengths (Received, Nominal):
(Calibration Data + Garbage Data + Fill Data + Error)
 - Band 1 - 5 and 7: $960 + 16 + 112 + 3 = 1,100$ Bytes(Check: Total Line Length - Active Scan Length = $7423 - 6323 = 1100$)
 - Band 6: $1,100 / 2 = 550$ Bytes
 - Band 8: $1,100 \times 2 = 2,200$ Bytes
10. LHS Margins: Bumper Wear + Extra
 - Bands 1 - 5 and 7: $17 + 23 = 40$ Bytes.
 - Band 6: $40/2 = 20$ Bytes (Margin is halved)
 - Band 8: $40 \times 2 = 80$ Bytes (Margin is doubled)
11. RHS Margins: Alignment Space + Bumper Wear + Extra
 - Bands 1 - 5 and 7: $206 + 17 + 17 = 240$ Bytes
 - Band 6: $240/2 = 120$ Bytes (Margin is halved)
 - Band 8: $240 \times 2 = 480$ Bytes (Margin is doubled)
12. Calibration Data Output Line Lengths (Maximum):
(Nominal + LHS side Margin + RHS Margin)
 - Band 1 - 5 and 7: $1,100 + 40 + 240 = 1,380$ Bytes
 - Band 6: $550 + 20 + 120 = 690$ Bytes (or $1,380/2$)
 - Band 8: $2,200 + 80 + 480 = 2,760$ Bytes (or $1,380 \times 2$)
13. Subinterval Calibration Data File Volumes (Maximum):
 - Band 1 - 5 and 7: $187,600 \times 1,380 = \sim 0.259$ GB
 - Band 6: $93,800 \times 690 = 0.065$ GB
 - Band 8: $375,200 \times 2,760 = \sim 1.036$ GB
14. Calibration Data File Volume (All Subinterval Bands, Maximum):
 - Format 1: (Bands 1 - 6): $0.259 \times 5 + 0.065 = 1.36$ GB
 - Format 2: (Bands 6 - 8): $0.065 + 0.259 + 1.036 = 1.36$ GB


Format 1

Calibration Data Lines - Band 1
Calibration Data Lines - Band 2
Calibration Data Lines - Band 3
Calibration Data Lines - Band 4
Calibration Data Lines - Band 5
Calibration Data Lines - Band 6

Format 2

Calibration Data Lines - Band 6
Calibration Data Lines - Band 7
Calibration Data Lines - Band 8

Figure 4-3: Calibration Data Files - Band Sequential Organization

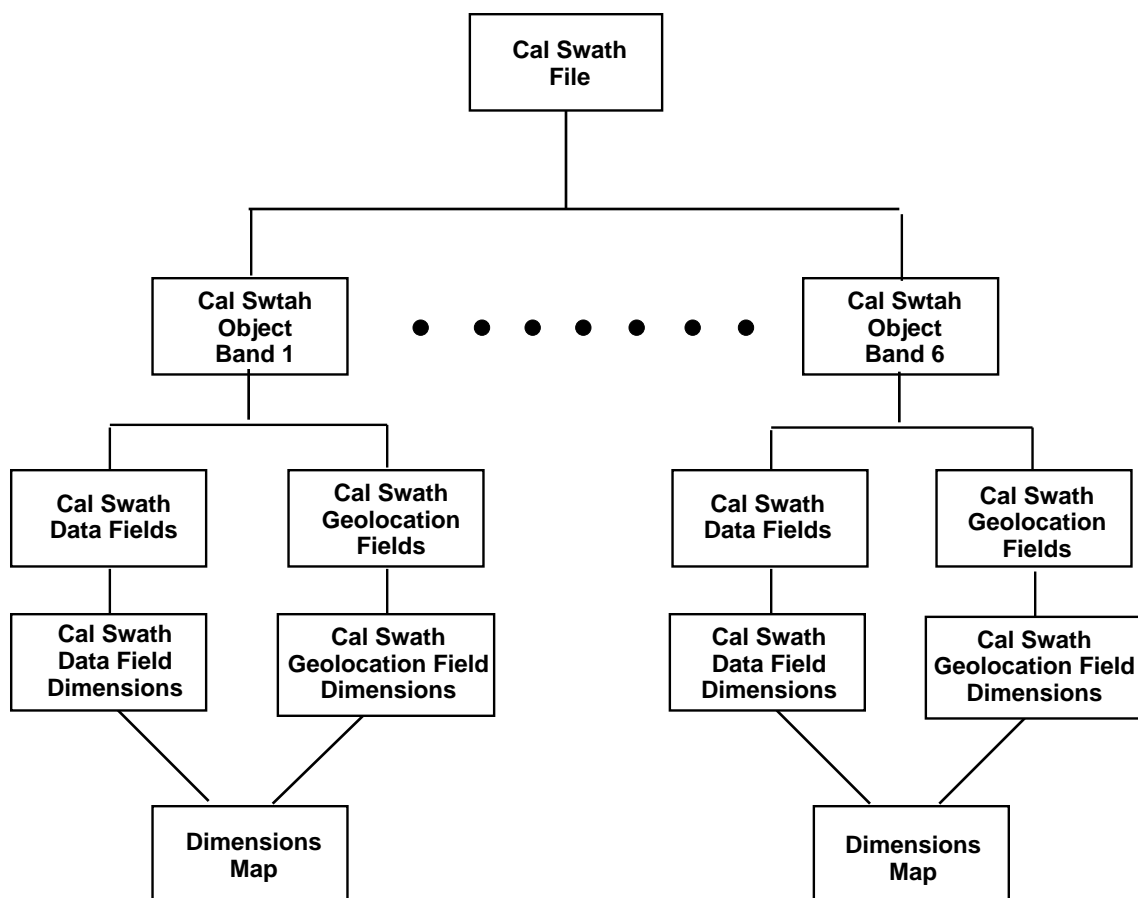

**Figure 4-4: Calibration Data File (Format 1 Example)
HDF-EOS Swath Structure**

Calibration Data Band-Detector Data Fields and Dimensions

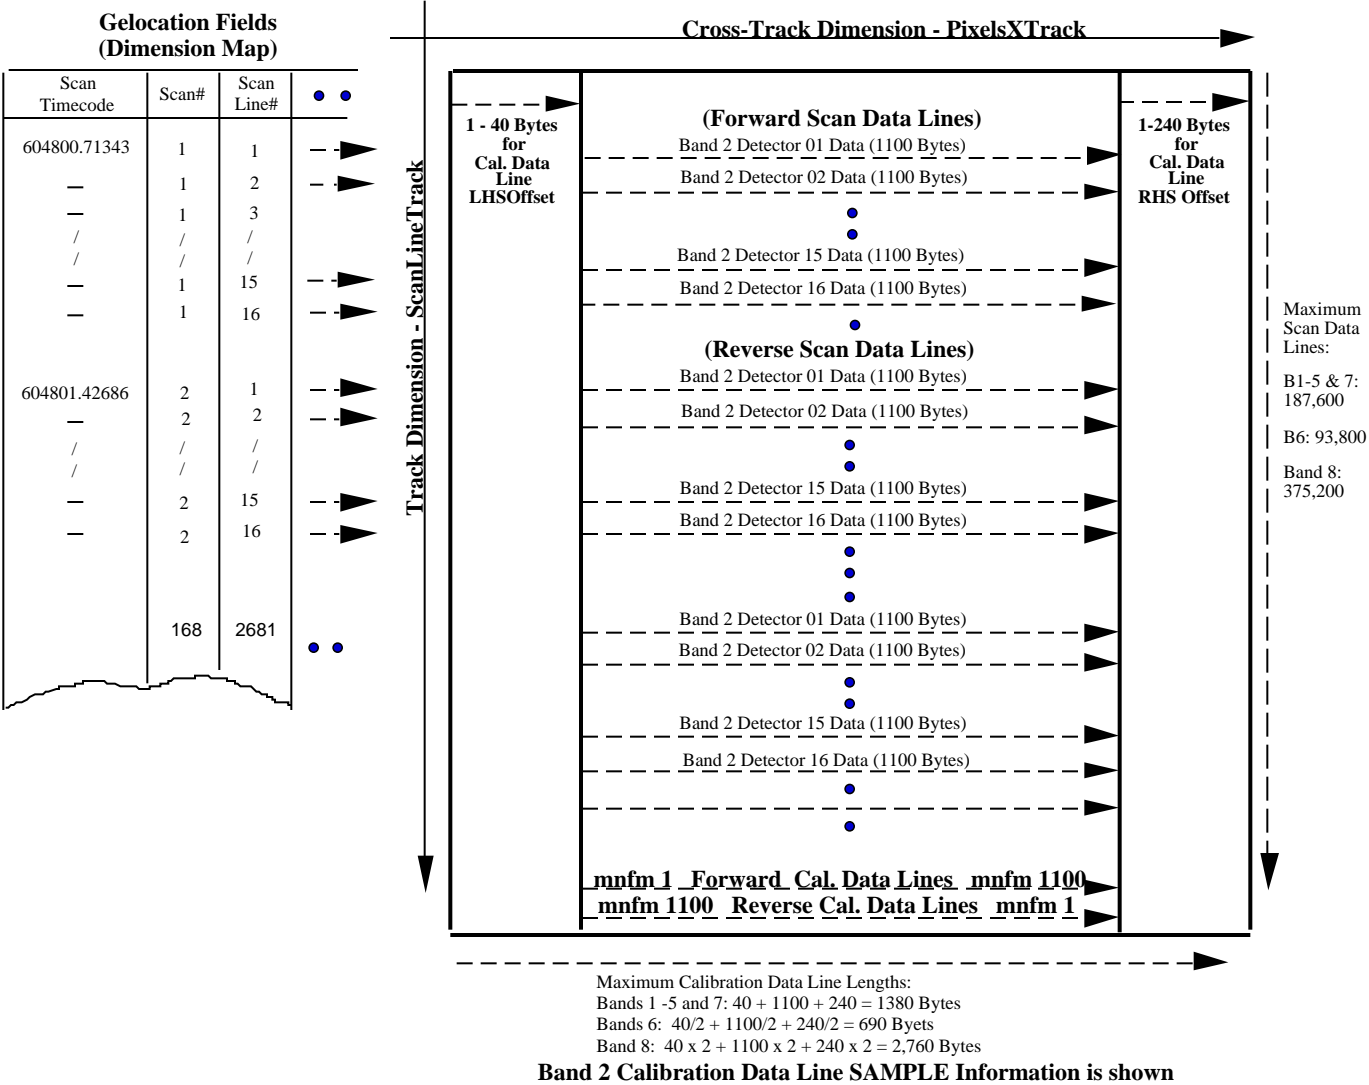


Figure 4-5: Calibration Data File - SDS Array and Dimensions

Table 4-11: Calibration Data File - Swath Definition Parameters

Swath Definition Parameter	Number Type and (Size)	Value, Format, Range and Unit	Parameter Description / Remarks
file_name	char8 (22)	= L7XsssfYDDOYHHuuv.xxx where xxx = CAL for a calibration data file.	See Section 3.4 for complete details on the LPS file naming convention. The LPS generates a calibration data file each for the ETM+ Format 1 and Format 2 data subintervals.
swath_name	char8 (6)	= Cal_Swath_Cis where "Cal_Swath_" identifies a Landsat 7 calibration data HDF-EOS swath object. One calibration data swath object is produced for each band in an ETM+ format, Format 1 or Format 2. All calibration data swath objects for an ETM+ format are included (grouped) in a single calibration data file (file name shown above). Cis identifies ETM+ Format 1 and Format 2 calibration data source bands as follows: Ci = C1 - C8 for Calibration data source Bands 1 - 8 s = 0 for single segment swaths for Bands 1 - 5 in an ETM+ Format 1 calibration data file s = "L" for the low gain Band 6 calibration data (swath) in an ETM+ Format 1 calibration data file. s = "H" for the high gain Band 6 calibration data in an ETM+ Format 2 calibration file. s = 0 for single segment swaths for Bands 7 and 8 in an ETM+ Format 2 calibration data file.	Defined in accordance the xxx = "Bis" extension used in the LPS file naming convention. The Format 1 calibration data file contains the following calibration data swaths (names): = Cal_Swath_C10 = Cal_Swath_C20 = Cal_Swath_C30 = Cal_Swath_C40 = Cal_Swath_C50 = Cal_Swath_C6L The Format 2 calibration data file contains the following calibration data swaths (names): = Cal_Swath_C6H = Cal_Swath_C70 = Cal_Swath_C80

Table 4-12: Calibration Data File - HDF Swath Attributes

Attribute Name	Number Type (ntype)	Count	Attribute Values	Remarks
detector_count	int8	1	= 16 for Bands 1-5 and 7, = 8 for Band 6, and = 32 for Band 8	

Table 4-13: Calibration Data File - HDF Swath Data Field Dimensions

Data Field Name	Number Type	Cross-Track Dimension Name and Size	Track Dimension Name and Size	Merge Code
cal_band_detector_data	uint8	<p>Name: PixelsXTrack Size: = 1380 for Bands 1-5 and 7 = 690 for Bands 6 = 2760 for Band 8</p> <p>Notes: This dimension includes the End-of-Line (EOL) and Scan Line Direction (SLD) minor frame data as follows: = 2 for Bands 1 -5 and 7 = 1 for Band 6L and 6H = 4 for Band 8</p>	<p>Name: ScanLineTrack Size: scan_no x detector_count where scan_no = 1 - 13135, and detector_count is as defined in Table 4-12.</p> <p>The possible range for ScanLineTrack Size = 1 - 210000 for bands 1-5 & 7 = 1 - 105000 for bands 6 = 1 - 420000 for Band 8</p>	<p>= HDFE_NOMERGE (0) (no merge)</p> <p>Keep calibration data swaths separate for each band.</p>

Table 4-14: Calibration Data File - HDF Swath Geolocation Fields

Geolocation Field Name	Number Type	Count	Value	Remarks
scan_timecode	char8	25	<p>Scan line time of the form 'YYYY:ddd:hh:mm:ss.tttttt' where</p> <p>YYYY: Four-digit Julian year ddd: Day (01 through 367**) hh: hours (00 through 23) mm: minutes (00 through 59) ss: seconds (00 through 59) tttttt: fractional seconds (0 - 9999375 or 0 - 15/16 milliseconds)</p> <p>** For cases when active imaging occurs at the end of a leap year.</p>	The ETM+ scan start time extracted from the timecode minor frames of the ETM+ major frame data reported in this record. A computed scan start time is provided if a valid time is not available from the ETM+ time code minor frames.
scan_time	float64	1	<p>The ETM+ scan time in seconds since midnight on January 1, 1993 (93:001:00:00:00.0000000). (TBR - LPS software CCR to provide time conversion)</p>	<p>The scan_time is obtained by converting the scan_timecode (see below) to seconds.</p> <p>The ECS Project/HDF requires scan times in the seconds format to search data archives.</p>
scan_no	uint16	1	<p>scan_no = 1 - 13125</p> <p>The maximum scan count is based on a subinterval duration of 14 minutes for 35 scenes, each consisting of 375 (355+20) scans.</p>	Provides a sequence counter for ETM+ scans (major frames) contained in a subinterval. The ETM+ scan counter is incremented by one for each new scan, real or flywheeled, added to the subinterval file.
scan_data_line_no	uint32	1	<p>scan_data_line_no = SSSSSS</p> <p>where SSSSSS = 1 - 210000 for Bands 1-5 and 7 = 1 - 105000 for Band 6 = 1 - 420000 for Band 8</p> <p>Note: All Band 8 calibration data lines are included in a single swath (not segmented like the band swath).</p>	<p>The scan line counter is incremented for each band-detector line added to the calibration data file. This counter is incremented once per ETM+ scan for Bands 1 - 5 and 7, once every two ETM+ scans for Band 6, and twice for each ETM+ scan for Band 8.</p> <p>The maximum line counts are shown for a 14-minute subinterval (35 scenes).</p>

Geolocation Field Name	Number Type	Count	Value	Remarks
scan_dir	char8	1	Scan direction character 'F' = Forward scan 'R' = Reverse scan	The ETM+ scan direction information interpolated from the Scan Line Data (SLD) minor frames of the first valid ETM+ major frame reported in this file. A valid ETM+ major frame has no errors.
detector_id	int8	1	where the detector_id is in the range: = 1-16 for Bands 1 - 5 and 7 = 1 - 8 detectors for Band 6 = 1 - 32 for Band 8	Each data line in a calibration data file consists of pixel data (bytes) from a single detector of a single band (see Figure 4-5). Each detector, chosen in an incrementing ID order, is used once during each scan for generating a scan line.
cal_data_line_offset_rhs	int8	1	= 1 - 240 bytes for Bands 1 -5 and 7 = 1 - 120 bytes for Bands 6L (Format 1) and 6H (Format 2) = 1 - 480 bytes for Band 8 The scan line data may be shifted to right in the band data buffer after an integer-pixel alignment.	The calibration line data in each record of the calibration data file is initially written with a predetermined size of byte offset on the left and right of the designated scan line data area. During integer-pixel alignment, these offsets provide moving in space (to avoid data loss) for the right- shifted band-detector data. After a integer-pixel alignment, this field indicates the resulting start and stop bytes/pixel positions for a scan lines. This offset also accommodates scan line length growths due to ETM+ scanner bumper wear. (See Figure 4-5)
cal_data_line_offset_lhs	int8	1	= 1 - 40 bytes for Bands 1 -5 and 7 = 1 - 20 bytes for Bands 6L (Format 1) and 6H (Format 2) = 1 - 80 bytes for Band 8 The scan line data may be shifted to left in the band data buffer after an integer-pixel alignment.	Note: The left-hand-side offset is not as significant as the right-hand-side margin. It can accommodate scan line length growths due to ETM+ scanner bumper wear. (See Figure 4-5)

Table 4-15: Calibration Data File - Swath Geolocation Field Dimensions

Geolocation Field Name	Number Type	Cross-Track Dimension Name and Size	Track Dimension Name and Size	Merge Code
scan_timecode	char8	None	Name: TimecodeTrack Size: 1 - 13125	= HDFE_ AUTOMERGE (1) (OK to merge fields with shared dimensions and/or data type)
scan_time	float64	None	Name: TimeTrack Size: 1 - 13125	= HDFE_ AUTOMERGE (1)
scan_no	uint16	None	Name: ScanTrack Size: 1 - 13125	= HDFE_ AUTOMERGE (1)
scan_data_line_no	uint32	None	Name: ScanLineNoTrack Size: 1 - 13125 x detector_count (See Table 4-12)	= HDFE_ AUTOMERGE (1)
scan_dir	char8	None	Name: ScanDirTrack Size: 1 - 13125	= HDFE_ AUTOMERGE (1)
detector_id	uint8	None	Name: DetectorIdTrack Size: 1 - 13125 x detector_count (See Table 4-12)	= HDFE_ AUTOMERGE (1)
cal_data_line_offset_rhs	int8	Name: RhsOffsetXTrack Size = 1 - 240 for Bands 1 -5 and 7) = 1 - 120 for Band 6L and 6H) = 1 - 480 for Band 8	Name: RhsOffsetTrack Size: 1 - 13125 x detector_count (See Table 4-12)	= HDFE_ AUTOMERGE (1) (merge)
cal_data_line_offset_lhs	int8	Name: LhsOffsetXTrack Size = 1 - 40 for Bands 1 -5 and 7) = 1 - 20 for Band 6L and 6H) = 1 -80 for Band 8	Name: LhsOffsetTrack Size: 1 - 13125 x detector_count (See Table 4-12)	= HDFE_ AUTOMERGE (1) (merge)

Table 4-16: calibration Data File - HDF Swath Dimension Map

Geolocation Dimension Name	Data Dimension Name	Offset	Increment
TimecodeTrack	ScanLineTrack	= 0 The timecode starts with the first scan line.	= detector_count The timecode repeats at detector count intervals.
TimeTrack	ScanLineTrack	= 0	= detector_count
ScanTrack	ScanLineTrack	= 0	= detector_count
ScanLineNoTrack	ScanLineTrack	= 0	= 1
ScanDirTrack	ScanLineTrack	= 0	= detector_count
DetectorIdTrack	ScanLineTrack	= 0 The detector Id starts with the first scan line.	= 1 The detector ID repeats on a scan line basis.
LhsOffsetTrack	ScanLineTrack	= 0 The left-hand side offset starts with the first scan line.	= 1 A left-hand side offset is present for each scan line.
RhsOffsetTrack	ScanLineTrack	= 0	= 1
LhsOffsetXTrack	PixelXTtrack	= 0 - 40 The left-hand-side offset start range.	= 1 The data gap data is written at one pixel increments.
RhsOffsetXTrack	PixelXTtrack	= (6600-270) - 6600 = 6330 - 6600 The right-hand-side offset start range.	= 1 The data gap data is written at one pixel increments.

4.2 Metadata File Format (HDF ODL/PVL)

4.2.1 Metadata File Description

The LPS generates individual metadata files for the ETM+ Format 1 and Format 2 subintervals. These files consist of two metadata segments: the subinterval and the WRS scene level. The subinterval metadata segment contains reference information on the subinterval raw wideband data source (e.g., an LGS X-band channel), the LPS resources (equipment strings) used in Level 0R processing, and identification information on the Level 0R data files produced for a Format 1 or a Format 2 subinterval. The WRS scene level metadata segment contains information for one or more WRS scenes identified for a subinterval during Level 0R processing. The WRS scene level metadata segment is further divided into scene metadata groups. Each scene metadata group contains identification information on a WRS scene, its geolocation references (e.g., scene center and corner information), its cloud cover assessment scores, and quality and accounting information on the band (image) and payload correction data associated with the WRS scene. The WRS scene level metadata segment may contain information on up to 35 WRS scenes received during a 14-minute Landsat 7 contact period.

The LPS metadata file for a Format 1 subinterval contains subinterval level and WRS scene level metadata for Bands 1 - 6. The LPS metadata file for a Format 2 subinterval contains subinterval level and WRS scene level metadata for Bands 6 - 8. The multiband scene browse file names and the automated cloud cover assessment (ACCA) results are provided in the ETM+ Format 1 (Bands 1 - 6) subinterval metadata only. Section 4.2.3 contains examples of the LPS Format 1 and Format 2 subinterval metadata files.

The LPS metadata file format conforms to the HDF Object Description Language (ODL) standard. Details on the ODL standard are provided in Applicable Document 2.1.7. Table 4-17 provides details on LPS parameter values and their formats for constructing the ETM+ Format 1 and Format 2 metadata files. In accordance with the ODL standard, all parameters and values are presented using ASCII standard characters.

The following notes apply to the construction of LPS metadata statements:

1. Leading zeros are omitted from all values except for parameters associated with WRS path and row (e.g., WRS_PATH and WRS_ROW) and in the metadata BEGIN_GROUP and END_GROUP statements (including a multiple digit field).
2. All absolute character strings, including single character strings such as "+", "-", "Y" and "N" characters, are enclosed with quotes (" ").
3. All values equal to or greater than zero (0) are considered positive. All values less than zero (0) are considered negative.

Table 4-17: Metadata File Format - ODL/PVL Parameter Values

Parameter Name	Size (ASCII Bytes)	Value, Format, Range, and Units	Parameter Description / Remarks
BEGIN_GROUP	As Req'd.	= FORMAT_m_METADATA_FILE; where m = 1 for Format 1 OR m = 2 for Format 2	Beginning of the first level ODL/PVL group. It indicates the start of the LPS Metadata File Level Group records for an ETM+ Format 1 or Format 2 subinterval.
BEGIN_GROUP	As Req'd.	= FORMAT_m_METADATA_FILE_INFO; m = 1 for Format 1 OR m = 2 for Format 2	Beginning of the second level ODL/PVL group. It indicates the start of the LPS Metadata File information Group records.
FILE_NAME	22	= L7XsssfYDDOYHHuuv.xxx where xxx = "MTA" for the metadata file.	Complete details on the LPS file naming convention are specified in Section 3.4.
FILE_CREATION_DATE_TIME	20	= YYYY-MM-DDThh:mm:ssZ where YYYY = Four-digit Julian year (e.g., 1998 and 2001) MM = Month number of a Julian year (01 - 12 for January to December) DD = Day of a Julian month (01 - 31) T indicates the start of time information in the CCSDS PVL ASCII time code format hh = Hours (00 - 23) mm = Minutes (00 - 59) ss = Seconds (00 - 59) Z indicates "Zulu" time (same as GMT)	The LPS system date and time when the metadata file for a Level 0R files set was created. For ease of human readability, this date and time information is presented in the PVL ASCII format. The time is expressed as Universal Coordinate Time (also known as Greenwich Mean Time (GMT)). This time format should be directly available from the LPS. Insertion of additional characters "T" and "Z" is required to meet the PVL ASCII time format.
FILE_VERSION_NO	2	= 00 - 99 where FILE_VERSION_NO = 00 indicates "not a reprocessed file" FILE_VERSION_NO = 01 - 99 indicates the file reprocess count. (leading zero is required)	Reprocessing indicator to distinguish this file from the metadata file generated earlier for the same subinterval and provided to the EDC DAAC. The reprocessing information is entered/supplied by an operator during setup of the Level 0R processing operations.

Parameter Name	Size (ASCII Bytes)	Value, Format, Range, and Units	Parameter Description / Remarks
STATION_ID	3	= SSS where SSS indicates a three character ground station code. For LPS, SSS = "EDC"	This parameter identifies the Landsat 7 ground station that produced the metadata and its associated Level 0R files. This parameter is used to distinguish the metadata and its associated Level 0R files that may be produced by the U.S. (e.g., EDC) and non-U.S. (e.g., GNC of Canada) ground stations using the same raw wideband data (with the same contact period start time).
SOFTWARE_VERSION_NO	5	= NNNNN where NNNNN is an alphanumeric string with an open format to indicate LPS software release, version, and test level, etc.,. Actual format will be determined by LPS during software development and by EDC during the operations phase.	Version number of the software installed on the LPS string when a metadata and its associated Level 0R files were generated.
IAS_PARAM_FILE_VERSION_NO	4	= 1 - 9999	The version number of the IAS Parameter file used in generating the Level 0R files identified in this metadata file.
END_GROUP	As Req'd.	= FORMAT_m_METADATA_FILE_INFO; m = 1 for Format 1 OR m = 2 for Format 2	End of the second level ODL/PVL group. It indicates the end of the LPS Metadata File information Group records.
BEGIN_GROUP	As Req'd.	= FORMAT_m_SUBINTERVAL_METADATA where m = 1 for Format 1 OR m = 2 for Format 2	Beginning of the second level ODL/PVL group. It indicates the start of the ETM+ Format 1 or Format 2 subinterval level Metadata group records.
SPACECRAFT_ID	9	= "Landsat7"	
SENSOR_ID	4	= "ETM+"	

Parameter Name	Size (ASCII Bytes)	Value, Format, Range, and Units	Parameter Description / Remarks
CONTACT_PERIOD_START_TIME	17	YYYY:DOY:HH:MM:SS where YYYY = Four-digit Julian year DOY = Julian day of year (001 - 366) HH = Hour of day (00 - 23) MM = Minutes (00 - 59) SS = Seconds (00 - 59)	The Julian date and GMT when the capture of a Landsat 7 contact period, associated with this subinterval, was started by the LPS. An uppercase time format indicates time obtained from LPS or a Landsat 7 system. A lowercase time format indicates time obtained from the Landsat 7 spacecraft wideband data (image and/or PCD).
CONTACT_PERIOD_STOP_TIME	17	YYYY:DOY:HH:MM:SS (See above: CONTACT_PERIOD_START_TIME)	The Julian date and GMT when the capture of a Landsat 7 contact period, associated with this subinterval, was completed by the LPS.
WRS_PATH:	3	= 001 - 233 (leading 0s are required)	The WRS path number for the scenes included in this subinterval.
STARTING_ROW	3	= 001 - 248 (leading 0s are required)	The starting WRS row number for the scene data included in this subinterval.
ENDING_ROW	3	= 001 - 248 (leading 0s are required)	The ending WRS row number for the scene data included in this subinterval.
SUBINTERVAL_START_TIME	25	= YYYY:ddd:hh:mm:ss.tttttt where YYYY = Four-digit Julian year ddd = Day (001 - 367*) hh = Hours (00 - 23) mm = Minutes (00 - 59) ss = Seconds (00 - 59) tttttt = Fractional seconds (0 - 9999375 or 0 -15/16 milliseconds) * For cases when active imaging occurs past the end of a leap year during a single contact period.	The spacecraft time extracted from the timecode minor frames of the first ETM+ major frame of the subinterval reported in this file. A computed start time is provided if the timecode in the first ETM+ major frame is in error. Note: The year information (Capitalized) is appended by LPS to the spacecraft timecode.

Parameter Name	Size (ASCII Bytes)	Value, Format, Range, and Units	Parameter Description / Remarks
SUBINTERVAL_STOP_TIME	25	= YYYY:ddd:hh:mm:ss.tttttt where the time format is the same as for SUBINTERVAL_START_TIME, above.	The spacecraft time extracted from the timecode minor frames of the last ETM+ major frame of the subinterval reported in this file. Note: The year information (Capitalized) is appended by LPS to the spacecraft timecode.
TOTAL_ETM+_SCANS	5	= N - 11725 where N is an LPS operator selectable parameter value for the smallest scene size to be included in a subinterval. The default value of N is 335.	The total number of ETM+ scans reported in this subinterval file. A maximum of 11,725 scans can be received in a 14 minute subinterval (based on a maximum of 35 scenes, each consisting of at most 335 scans)
PCD_START_TIME	25	= YYYY:ddd:hh:mm:ss.tttttt where the time format is the same as for SUBINTERVAL_START_TIME, above.	Spacecraft time of the first PCD major frame in the PCD file associated with this subinterval.
PCD_STOP_TIME	25	= YYYY:ddd:hh:mm:ss.tttttt where the time format is the same as for SUBINTERVAL_START_TIME, above.	Spacecraft time of the last PCD major frame in the PCD file associated with this subinterval.
TOTAL_PCD_MAJOR_FRAMES	3	= 0 - 255	The total number of PCD major frames received in the PCD file associated with this subinterval. Approximately 212 major frames can be received by the LPS during a 14-minute subinterval.

Parameter Name	Size (ASCII Bytes)	Value, Format, Range, and Units	Parameter Description / Remarks
ETM+_LAST_ON_TIME	25	= YYYY:ddd:hh:mm:ss.tttttt where the time format is the same as for SUBINTERVAL_START_TIME, above.	See the Landsat 7 DFCB for details on this time. This information is found as a 48-bit extended precision floating-point value in seconds from midnight of the first day of the current year. A maximum of 31,622,400 seconds are possible in a year. The time in seconds is converted to the spacecraft time format for quick comparison with the spacecraft times used in this file.
ETM+_LAST_OFF_TIME	25	= YYYY:ddd:hh:mm:ss.tttttt where the time format is the same as for SUBINTERVAL_START_TIME, above.	See description, above, for ETM+_LAST_ON_TIME.
UT1_CORRECTION	5	= 0 - 0.900 second This time could be as large as 0.9 seconds in increments of unit milliseconds.	The UTC-UT1 time difference in seconds obtained from the Landsat 7 Calibration Parameter file received from IAS.
BAND1_PRESENT_F1	1	= "Y" indicates that Band 1 is present OR = "N" indicates that Band 1 is not present This field is included in the ETM+ Format 1 metadata only.	This is the "Band 1 ON" status information obtained from PCD Serial Word "B" (major frame (2), minor frame 32, word 72), bit 0, where a bit set condition (=1) indicates "Band 1 present"
BAND2_PRESENT_F1	1	(Same as BAND1_PRESENT_F1 values and format). This field is included in the ETM+ Format 1 metadata only.	This is the "Band 2 ON" status information obtained from PCD Serial Word "B" (major frame (2), minor frame 32, word 72), bit 1, where a bit set condition (=1) indicates "Band 2 present"
BAND3_PRESENT_F1	1	(Same as BAND1_PRESENT_F1 values and format). This field is included in the ETM+ Format 1 metadata only.	This is the "Band 3 ON" status information obtained from PCD Serial Word "B" (major frame (2), minor frame 32, word 72), bit 2, where a bit set condition (=1) indicates "Band 3 present"

Parameter Name	Size (ASCII Bytes)	Value, Format, Range, and Units	Parameter Description / Remarks
BAND4_PRESENT_F1	1	(Same as BAND1_PRESENT_F1 values and format). This field is included in the ETM+ Format 1 metadata only.	This is the "Band 4 ON" status information obtained from PCD Serial Word "B" (major frame (2), minor frame 32, word 72), bit 3, where a bit set condition (=1) indicates "Band 4 present"
BAND5_PRESENT_F1	1	(Same as BAND1_PRESENT_F1 values and format). This field is included in the ETM+ Format 1 metadata only.	This is the "Band 5 ON" status information obtained from PCD Serial Word "B" (major frame (2), minor frame 32, word 72), bit 4, where a bit set condition (=1) indicates "Band 5 present"
BAND6_PRESENT_F1	1	(Same as BAND1_PRESENT_F1 values and format). This field is included in the ETM+ Format 1 metadata only.	This is the "Band 6/MIR ON" status information obtained from PCD Serial Word "B" (major frame (2), minor frame 32, word 72), bit 5, where a bit set condition (=1) indicates "Band 6 (Low gain) present"
BAND6_PRESENT_F2	1	= "Y" indicates that Band 1 is present OR = "N" indicates that Band 1 is not present This field is included in the ETM+ Format 2 metadata only.	This is the "Band 6/MIR ON" status information obtained from PCD Serial Word "B" (major frame (2), minor frame 32, word 72), bit 5, where a bit set condition (=1) indicates "Band 6 (High gain) present"
BAND7_PRESENT_F2	1	(Same as BAND6_PRESENT_F2 values and format). This field is included in the ETM+ Format 2 metadata only.	This is the "Band 7 ON" status information obtained from PCD Serial Word "B" (major frame (2), minor frame 32, word 72), bit 6, where a bit set condition (=1) indicates "Band 7 present"
BAND8_PRESENT_F2	1	(Same as BAND6_PRESENT_F2 values and format). This field is included in the ETM+ Format 2 metadata only.	This is the "Band 8 ON" status information obtained from PCD Serial Word "E" (major frame (2), minor frame 35, word 72), bit 0, where a bit set condition (=1) indicates "Band 8 present"

Parameter Name	Size (ASCII Bytes)	Value, Format, Range, and Units	Parameter Description / Remarks
TOTAL_WRS_SCENES	2	= 0 - 99	This count indicates the total number of WRS scenes identified by LPS in a subinterval. A maximum of 35 WRS scenes, including partial scenes at the start and/or the end of a subinterval, may be received by LPS in a 14-minute subinterval. This count also indicates the total number of multiband scene browse files that may be produced by LPS and reported in the scene metadata segment.
PARTIAL_WRS_SCENES	1	= 0 - 2	Indicates the count of partial scenes, if any, at the start and/or at the end of a subinterval.
TOTAL_FILES	2	= 10 - 45 for Format 1 OR = 6 - 9 for Format 2	The total number of LPS files included in this subinterval for ETM+ Format 1 or Format 2. Assuming that a subinterval contains at least one scene, the metadata file will contain the names of a minimum of 10 files (6 Band, 1 MSCD, 1 PCD, 1 Calibration and 1 Multiband Scene Browse files) for Format 1, and 6 files (3 band, 1 MSCD, 1 PCD, and 1 Calibration files) for Format 2, respectively.
BAND1_FILE_NAME_F1	22	= L7XsssfYDDOYHHuuv.xxx (See Section 3.4 for details on the file naming convention. For the Band 1 file name: xxx = B10 (Format 1 only)	This file name is included in a Format 1 metadata file only.
BAND2_FILE_NAME_F1	22	= L7XsssfYDDOYHHuuv.xxx (See Section 3.4 for details on the file naming convention. For the Band 2 file name: xxx = B20 (Format 1 only)	This file name is included in a Format 1 metadata file only.

Parameter Name	Size (ASCII Bytes)	Value, Format, Range, and Units	Parameter Description / Remarks
BAND3_FILE_NAME_F1	22	= L7XsssfYDDOYHHuuv.xxx (See Section 3.4 for details on the file naming convention. For the Band 3 file name: xxx = B30 (Format 1 only)	This file name is included in a Format 1 metadata file only.
BAND4_FILE_NAME_F1	22	= L7XsssfYDDOYHHuuv.xxx (See Section 3.4 for details on the file naming convention. For the Band 4 file name: xxx = B40 (Format 1 only)	This file name is included in a Format 1 metadata file only.
BAND5_FILE_NAME_F1	22	= L7XsssfYDDOYHHuuv.xxx (See Section 3.4 for details on the file naming convention. For the Band 5 file name: xxx = B50 (Format 1 only)	This file name is included in a Format 1 metadata file only.
BAND6L_FILE_NAME_F1	22	= L7XsssfYDDOYHHuuv.xxx (See Section 3.4 for details on the file naming convention. For the Band 6 file name: xxx = B6L (Format 1 only)	This file name is included in a Format 1 metadata file only.
BAND6H_FILE_NAME_F2	22	= L7XsssfYDDOYHHuuv.xxx (See Section 3.4 for details on the file naming convention. For the Band 6 file name: xxx = B6H (Format 2 only)	This file name is included in a Format 2 metadata file only.
BAND7_FILE_NAME_F2	22	= L7XsssfYDDOYHHuuv.xxx (See Section 3.4 for details on the file naming convention. For the Band 7 file name: xxx = B70 (Format 2 only)	This file name is included in a Format 2 metadata file only.

Parameter Name	Size (ASCII Bytes)	Value, Format, Range, and Units	Parameter Description / Remarks
BAND8_FILE_1_NAME_F2	22	= L7XsssfYDDOYHHuuv.xxx (See Section 3.4 for details on the file naming convention. For the Band 8, Segment 1 file name: xxx = B81 (Format 2 only)	This Band 8 file segment name is included in a Format 2 metadata file only. Up to four Band 8 file segments are expected in a Format 2 subinterval.
BAND8_FILE_2_NAME_F2	22	= L7XsssfYDDOYHHuuv.xxx (See Section 3.4 for details on the file naming convention. For the Band 8, Segment 2 file name: xxx = B82 (Format 2 only)	The name of this Band 8 file segment, if it exists in a subinterval, is included in a Format 2 metadata file only.
BAND8_FILE_3_NAME_F2	22	= L7XsssfYDDOYHHuuv.xxx (See Section 3.4 for details on the file naming convention. For the Band 8, Segment 3 file name: xxx = B83 (Format 2 only)	The name of this Band 8 file segment, if it exists in a subinterval, is included in a Format 2 metadata file only.
BAND8_FILE_4_NAME_F2	22	= L7XsssfYDDOYHHuuv.xxx (See Section 3.4 for details on the file naming convention. For the Band 8, Segment 4 file name: xxx = B84 (Format 2 only)	The name of this Band 8 file segment, if it exists in a subinterval, is included in a Format 2 metadata file only.
MSCD_FILE_NAME	22	= L7XsssfYDDOYHHuuv.xxx (See Section 3.4 for details) xxx = MSD for an MSCD file	Name of the Mirror Scan Correction Data (MSCD) file (Format 1 or Format 2) associated with this subinterval.
PCD_FILE_NAME	22	= L7XsssfYDDOYHHuuv.xxx (See Section 3.4) xxx = PCD for a PCD file	Name of the Payload Correction Data (PCD) file (Format 1 or Format 2) associated with this subinterval.
CAL_FILE_NAME	22	= L7XsssfYDDOYHHuuv.xxx (See Section 3.4) xxx = CAL for a Calibration file	Name of the Calibration file (Format 1 or Format 2) associated with this subinterval.

Parameter Name	Size (ASCII Bytes)	Value, Format, Range, and Units	Parameter Description / Remarks
END_GROUP	As Req'd.	= FORMAT_m_ SUBINTERVAL_ METADATA; m = 1 for Format 1 OR m = 2 for Format 2	End of the second level ODL/PVL group. It indicates the end of the ETM+ Format 1 or Format 2 subinterval level Metadata group records.
Scene Metadata Segment (not an LPS metadata parameter)			The following parameters values are repeated for each ETM+ Format 1 or Format 2 scenes included in a subinterval.
BEGIN_GROUP	As Req'd.	= FORMAT_m_ SCENE_NN_ METADATA; m = 1 for Format 1 OR m = 2 for Format 2 and NN = 01 - 99 (Up to 35 scenes are expected in a 14-minute subinterval)	Beginning of the second level ODL/PVL group. It indicates the beginning of the ETM+ Format 1 or Format 2 Scene NN level Metadata group records.
BEGIN_GROUP	As Req'd.	= WRS_SCENE_NN_ METADATA; where NN = 01 - 99	Beginning of the third level ODL/PVL group. It indicates the beginning of the ETM+ Format 1 WRS Scene 1 Metadata group records.
Scene Metadata Segment (not an LPS metadata parameter)			The following parameters values are repeated for each WRS scene included in the subinterval.
WRS_SCENE_NO	2	= 1 - 99	This is the LPS assigned WRS scene number within a subinterval.
FULL_OR_PARTIAL_SCENE?	1	= "F" or "P" where F indicates a full WRS scene OR P indicates a partial WRS scene at the start or end of a subinterval.	The LPS may receive partial WRS scene at the start or end of a subinterval.

Parameter Name	Size (ASCII Bytes)	Value, Format, Range, and Units	Parameter Description / Remarks
BROWSE_FILE_NAME	22	= L7XsssfYDOYHHuuV.xxx for a Format 1 subinterval (See Section 3.4) OR No browse file names are provided if its a Format 2 subinterval. xxx = Rnn where R indicates a Multiband Scene Browse file, and nn = 00 - 99 indicates the Multiband Scene Browse file number within a subinterval.	The LPS generates Multiband Scene Browse files for ETM+ Format 1 (Bands 1 - 6) only. The names of all Multiband Scene Browse files, generated for a Format 1 subinterval, are reported in the Format 1 metadata. A maximum of 35 WRS scenes are possible in a subinterval.
WRS_PATH	3	= 001 - 233 (leading zeros are required)	The WRS path number associated with the scene
WRS_ROW	3	= 001 - 248 (leading zeros are required)	The WRS row number associated with the scene
SCENE_CENTER_SCAN_NO	5	= 1 - 11725 For some partial scenes a scene center scan number may be outside the subinterval range and shown as a negative value (e.g., A value of -175 would indicate a partial scene center scan (number) above the first or below the last ETM+ scan in a subinterval).	The ETM+ scan number whose center is closest to the center of a nominal WRS scene. A WRS scene scan number within a 14-minute subinterval can be as high as 11,725.
SCENE_CENTER_SCAN_TIME	25	= YYYY:ddd:hh:mm:ss.tttttt where the time format is the same as for SUBINTERVAL_START_TIME, above.	The spacecraft time associated with a WRS scene center scan (number). TBR - Time format is per spacecraft time. EDC/ECS may a desire searchable format.
SCENE_CENTER_LAT	8	= -90.0000 through +90.0000 degrees (with a 4-digit precision) A positive (+) value defines a latitude to the North. A negative (-) value defines a latitude to the South.	WRS Scene Center Latitude - LPS calculated "true" coordinate value.

Parameter Name	Size (ASCII Bytes)	Value, Format, Range, and Units	Parameter Description / Remarks
SCENE_CENTER_LON	9	= -180.0000 through +180.0000 degrees (with a 4-digit precision) A positive value (+) defines a longitude to the East. A negative (-) defines a longitude to the West.	WRS Scene Center Longitude - LPS calculated "true" coordinate value.
HORIZONTAL_DISPLAY_SHIFT	5	= - 9999 through + 9999 meters A negative (-) value defines a shift of the calculated "true" WRS scene center to the West of the nominal WRS scene center. A positive (+) value defines a shift of the calculated "true" WRS scene center to the EAST of the nominal WRS scene center.	The horizontal distance between the perpendiculars through the LPS calculated "true" WRS Scene Center and the nominal (known) WRS scene center on ground. The LPS will maintain a lookup table of nominal WRS scene centers for computing the HORIZONTAL_DISPLAY_SHIFT (HDS) values for WRS scenes.
SCENE_UL_CORNER_LAT	8	= -90.0000 through +90.0000 degrees (with a 4-digit precision) A positive (+) value defines a latitude to the North. A negative (-) value defines a latitude to the South.	WRS scene upper left corner latitude - LPS calculated "true" coordinate value.
SCENE_UL_CORNER_LON	9	= -180.0000 through +180.0000 degrees (with a 4-digit precision) A positive value (+) defines a longitude to the East. A negative (-) defines a longitude to the West.	WRS scene upper left corner longitude - LPS calculated "true" coordinate value.
SCENE_UR_CORNER_LAT	8	= -90.0000 through +90.0000 degrees (with a 4-digit precision) A positive (+) value defines a latitude to the North. A negative (-) value defines a latitude to the South.	WRS scene upper right corner latitude - LPS calculated "true" coordinate value.

Parameter Name	Size (ASCII Bytes)	Value, Format, Range, and Units	Parameter Description / Remarks
SCENE_UR_CORNER_LON	9	= -180.0000 through +180.0000 degrees (with a 4-digit precision) A positive value (+) defines a longitude to the East. A negative (-) defines a longitude to the West.	WRS scene upper right corner longitude - LPS calculated "true" coordinate value.
SCENE_LL_CORNER_LAT	8	= -90.0000 through +90.0000 degrees (with a 4-digit precision) A positive (+) value defines a latitude to the North. A negative (-) value defines a latitude to the South.	WRS scene lower left corner latitude - LPS calculated "true" coordinate value.
SCENE_LL_CORNER_LON	9	= -180.0000 through +180.0000 degrees (with a 4-digit precision) A positive value (+) defines a longitude to the East. A negative (-) defines a longitude to the West.	WRS scene lower left corner longitude - LPS calculated "true" coordinate value.
SCENE_LR_CORNER_LAT	8	= -90.0000 through +90.0000 degrees (with a 4-digit precision) A positive (+) value defines a latitude to the North. A negative (-) value defines a latitude to the South.	WRS scene lower right corner latitude - LPS calculated "true" coordinate value.
SCENE_LR_CORNER_LON	9	= -180.0000 through +180.0000 degrees (with a 4-digit precision) A positive value (+) defines a longitude to the East. A negative (-) defines a longitude to the West.	WRS scene lower right corner longitude - LPS calculated "true" coordinate value.
SCENE_CCA	3	= 0 - 100	WRS Scene Cloud cover assessment (CCA) - Indicates the percent of a WRS scene area covered with clouds. This CCA is an average of the CCAs for all quadrants of the WRS scene.
UL_QUAD_CCA	3	= 0 - 100	Indicates the percent of upper left quadrant of the WRS scene area covered with clouds.

Parameter Name	Size (ASCII Bytes)	Value, Format, Range, and Units	Parameter Description / Remarks
UR_QUAD_CCA	3	= 0 - 100	Indicates the percent of upper right quadrant of the WRS scene area covered with clouds.
LL_QUAD_CCA	3	= 0 - 100	Indicates the percent of lower left quadrant of the WRS scene area covered with clouds.
LR_QUAD_CCA	3	= 0 - 100	Indicates the percent of lower right quadrant of the WRS scene area covered with clouds.
ACCA_ALGORITHM_ID_VER	22 (TBR)	= 22 ASCII characters The algorithm name and version numbers are determined by the Landsat 7 Project.	Identifies the ACCA algorithm (name and version number), used by LPS in calculating the automated cloud cover assessment for this scene.
SUN_AZIMUTH_ANGLE	12	= -180.0000000 through +180.0000000 degrees (with 7-digit precision) A positive value (+) indicates angles to the East or clockwise from North; A negative value (-) indicates angles to the West or counterclockwise from North (Leading zeros are not required)	The Sun azimuth angle at the "true" WRS scene center (LPS calculated).
SUN_ELEVATION_ANGLE	12	= -90.0000000 through +90.0000000 degrees (with 7-digit precision) A positive value (+) indicates a daytime scene; A negative value (-) indicates a night time scene (Leading zeros are not required)	The Sun elevation angle at the "true" WRS scene center (LPS calculated).

Parameter Name	Size (ASCII Bytes)	Value, Format, Range, and Units	Parameter Description / Remarks
BAND1_GAIN_F1	1	= "L" for a low gain condition or = "H" for a high gain condition This field is included in the ETM+ Format 2 metadata only.	The band gain condition detected at the start of a WRS scene. This information is obtained from Words 7 and 8 of the PCD/Status Data field of the first error-free VCDU in a WRS scene. This parameter is commonly used by LPS to report band gain states for ETM+ Format 1 or Format 2 data. Other ground stations may use this parameter to report band gain states in either one or both formats.
BAND2_GAIN_F1	1	= "L" for a low gain condition or = "H" for a high gain condition This field is included in the ETM+ Format 1 metadata only.	(See parameter description for BAND1_GAIN_F1)
BAND3_GAIN_F1	1	= "L" for a low gain condition or = "H" for a high gain condition This field is included in the ETM+ Format 1 metadata only.	(See parameter description for BAND1_GAIN_F1)
BAND4_GAIN_F1	1	= "L" for a low gain condition or = "H" for a high gain condition This field is included in the ETM+ Format 1 metadata only.	(See parameter description for BAND1_GAIN_F1)
BAND5_GAIN_F1	1	= "L" for a low gain condition or = "H" for a high gain condition This field is included in the ETM+ Format 1 metadata only.	(See parameter description for BAND1_GAIN_F1)
BAND6_GAIN_F1	1	= "L" for a low gain condition or = "H" for a high gain condition This field is included in the ETM+ Format 1 metadata only.	(See parameter description for BAND1_GAIN_F1)

Parameter Name	Size (ASCII Bytes)	Value, Format, Range, and Units	Parameter Description / Remarks
BAND6_GAIN_F2	1	= "L" for a low gain condition or = "H" for a high gain condition This field is included in the ETM+ Foramt 2 metadata only.	(See parameter description for BAND1_GAIN_F1)
BAND7_GAIN_F2	1	= "L" for a low gain condition or = "H" for a high gain condition This field is included in the ETM+ Foramt 2 metadata only.	(See parameter description for BAND1_GAIN_F1)
BAND8_GAIN_F2	1	= "L" for a low gain condition or = "H" for a high gain condition This field is included in the ETM+ Foramt 2 metadata only.	(See parameter description for BAND1_GAIN_F1)
BAND1_GAIN_CHANGE_F1	1	= 0 indicates no band gain change within scene or = "+" indicates a low to high band gain change within scene or = "-" indicates a high to low band gain change witin scene This field is included in the ETM+ Foramt 1 metadata only.	Band gain change flags are generated by LPS by evaluating correspondiong band gain states in adjacent ETM+ scans (major frames). This parameter is commonly used by LPS to report on band gain changes in ETM+ Format 1 or Format 2. Other ground stations may use this parameter to report band gain changes in either one or both formats.
BAND2_GAIN_CHANGE_F1	1	(Same as for BAND1_GAIN_CHANGE_F1) This field is included in the ETM+ Foramt 1 metadata only.	(See parameter description for BAND1_GAIN_CHANGE_F1)
BAND3_GAIN_CHANGE_F1	1	(Same as for BAND1_GAIN_CHANGE_F1) This field is included in the ETM+ Foramt 1 metadata only.	(See parameter description for BAND1_GAIN_CHANGE_F1)

Parameter Name	Size (ASCII Bytes)	Value, Format, Range, and Units	Parameter Description / Remarks
BAND4_GAIN_CHANGE_F1	1	(Same as for BAND1_GAIN_CHANGE_F1) This field is included in the ETM+ Foramt 1 metadata only.	(See parameter description for BAND1_GAIN_CHANGE_F1)
BAND5_GAIN_CHANGE_F1	1	(Same as for BAND1_GAIN_CHANGE_F1) This field is included in the ETM+ Foramt 1 metadata only.	(See parameter description for BAND1_GAIN_CHANGE_F1)
BAND6_GAIN_CHANGE_F1	1	(Same as for BAND1_GAIN_CHANGE_F1) This field is included in the ETM+ Foramt 1 metadata only.	(See parameter description for BAND1_GAIN_CHANGE_F1)
BAND6_GAIN_CHANGE_F2	1	= 0 indicates no band gain change within scene or = "+" indicates a low to high band gain change within scene or = "-" indicates a high to low band gain change within scene This field is included in the ETM+ Foramt 2 metadata only.	Band gain change flags are generated by LPS by evaluating corresponding band gain states in adjacent ETM+ scans (major frames). This parameter is commonly used by LPS to report on band gain changes in ETM+ Format 1 or Format 2. Other ground stations may use this parameter to report band gain changes in either one or both formats.
BAND7_GAIN_CHANGE_F2	1	(Same as for BAND6_GAIN_CHANGE_F2) This field is included in the ETM+ Foramt 2 metadata only.	(See parameter description for BAND6_GAIN_CHANGE_F2)
BAND8_GAIN_CHANGE_F2	1	(Same as for BAND6_GAIN_CHANGE_F2) This field is included in the ETM+ Foramt 2 metadata only.	(See parameter description for BAND6_GAIN_CHANGE_F2)

Parameter Name	Size (ASCII Bytes)	Value, Format, Range, and Units	Parameter Description / Remarks
FULL_APERTURE_CAL_FLAG	1	= "N" indicates no full calibration activity during this scene OR = "Y" indicates a full calibration activity	This field indicates the ETM+ full calibration activity during this scene. The calibration door activity flag is interpolated from "serial word P" of the third PCD major frame, minor frame 83, word 72, bits 2 and 3.
DAY_NIGHT_FLAG	1	= "D" for day flag 'True' OR = "N" for night flag 'True'	This field indicates the day or night condition for the scene. The LPS determines the day/night condition of a scene by comparing the Sun azimuth and elevation values against an angle value of 0 degree. A scene is declared a day scene if the Sun azimuth angle is greater than 0 degrees; otherwise it is declared a night scene.
END_GROUP	As Req'd.	= WRS_SCENE_NN_METADATA; where NN = 01 - 99 (Up to 35 scenes are expected to be received by LPS in a 14-minute subinterval)	End of the third level ODL/PVL group. It indicates the end of the ETM+ Format 1 or Format 2 WRS Scene Metadata group records.
Image Q&A Data (not an LPS metadata parameter)			The following parameter values are repeated for each WRS scene included in this subinterval.
BEGIN_GROUP	As Req'd.	= WRS_SCENE_NN_ETM+_Q&A; where NN = 01 - 99	Beginning of the third level ODL/PVL group. It indicates the beginning of the ETM+ Format 1 or Format 2 Scene NN Q&A data group records.
CADUS/VCDUS_RECEIVED	6	= 1 - 999999	The total number of CADUs/VCDUs received for this scene. Approximately 362,380 VCDUs are expected to be received for a 26.8 second long WRS scene. A WRS scene consists of a maximum of 375 including 40 overlap scans.
FLY_WHEEL_CADUS	6	= 0 - 999999	The total number of CADUs fly-wheeled due to sync errors.

Parameter Name	Size (ASCII Bytes)	Value, Format, Range, and Units	Parameter Description / Remarks
R-S_ERR_VCDUS	6	= 0 - 999999	The total number of VCDUs with Reed-Solomon error corrected in the header field.
BCH_CORRECTED_VCDUS	6	= 0 - 999999	The total number of VCDUs with BCH errors corrected for up to 3 bits in their mission data fields.
BCH_UNCORRECTED_VCDUS	6	= 0 - 999999	The total number of VCDUs containing uncorrected BCH errors (bits) in their mission data fields.
BIT_ERROR_RATE	4	= 0 - 9999 = "****" indicates a counter overflow (BIT_ERROR_RATE > 9999) for excessively noisy data.	The average number of bit errors found in blocks of 100,000 bits aggregated over the whole length of the subinterval. This BER is calculated using bit errors detected (corrected or not) during CRC and BCH checks of the input VCDUs. An input data bit error rate of 1 in 100,000 or less is considered acceptable.
ETM+_TIMECODE_ERRORS	3	0 - 999	The total number of ETM+ scans (major frames) detected with errors in their time code fields during processing of this subinterval. A maximum of 375 ETM+ scans are possible in a WRS scene.
ENTIRELY_FILLED_SCANS	3	0 - 999	The total number of ETM+ major frames (maximum of 375) in this WRS scene (~26.8 seconds for 375 scans) that were entirely filled using a pre-determined fill data pattern.
PARTIALLY_FILLED_SCANS	3	0 - 999	The total number of ETM+ major frames (maximum of 375) in this WRS scene that were partially filled using a pre-determined fill data pattern.

Parameter Name	Size (ASCII Bytes)	Value, Format, Range, and Units	Parameter Description / Remarks
END_GROUP	As Req'd.	= WRS_SCENE_NN_ETM+_Q&A; where NN = 01 - 99	End of the third level ODL/PVL group. It indicates the end of the ETM+ Q&A data group records for WRS scene NN.
PCD Q&A Data (not an LPS metadata parameter)			The following parameter values are repeated for each WRS scene included in the subinterval.
BEGIN_GROUP	As Req'd.	= WRS_SCENE_NN_PCD_Q&A; where NN = 01 - 99	Beginning of the third level ODL/PVL group. It indicates the beginning of the PCD Q&A data group records for WRS Scene NN.
PCD_WORDS_RECEIVED	6	= 0 - 999999	The total number of PCD words, extracted from the unpacked PCD words (one sync byte, 3 repeated data bytes, and at least 4 fill bytes), received for this scene. Approximately 106,341 packed PCD words can be received by LPS for a 26.8-second scene.
PCD_BYTE_VOTING_ERR	6	= 0 - 999999	The total number of PCD word that encountered byte-voting errors during packing (for a maximum of 106,341 words).
TOTAL_PCD_MINOR_FRAMES	5	= 0 - 99999	The total number of PCD minor frames constructed during this scene. Approximately 20,230 PCD minor frames can be received by LPS for a 26.8-second WRS scene.
PCD_MINOR_FRAME_ERR	3	= 1 - 999	The total number of PCD minor frames which encountered sync errors during their construction for a scene. Up to 838 minor frames for a WRS scene are expected.
FILLED_PCD_MINOR_FRAMES	3	= 1 - 999	The total number of PCD minor frames which required a data fill during their construction.

Parameter Name	Size (ASCII Bytes)	Value, Format, Range, and Units	Parameter Description / Remarks
FILLED_PCD_MAJOR_FRAMES	1	= 0 - 9	The total number of PCD major frames which required a data fill during their construction. Approximately 7 major frames can be received by LPS for a 26.8 second long WRS scene.
END_GROUP	As Req'd.	= WRS_SCENE_NN_PCD_Q&A; where NN = 01 - 99	Beginning of the third level ODL/PVL group. It indicates the end of the PCD Q&A data group records for WRS Scene NN.
Processed PCD Q&A Data (not an LPS metadata parameter)			The following parameter values are repeated for each WRS scene included in the subinterval.
BEGIN_GROUP	As Req'd.	= WRS_SCENE_NN_PROCESSED_PCD_Q&A; where NN = 01 - 99	Beginning of the third level ODL/PVL group. It indicates the beginning of the processed PCD Q&A data group records for WRS Scene NN.
TOTAL_ATTITUDE_POINTS	2	= 0 - 99	The total number of spacecraft attitude data points (quaternions) received and processed from the PCD associated with this scene. Approximately 27 spacecraft attitude data points can be received for a 26.8-second WRS scene.
REJECTED_ATTITUDE_POINTS	2	= 0 - 99	The total number of spacecraft attitude data points (quaternions) found to fail the PCD quality checks. The rejected data points are flagged and included in the PCD file associated with this WRS scene.
MISSING_ATTITUDE_POINTS	2	= 0 - 99	The total number of spacecraft attitude data points (quaternions) found missing during PCD quality checks. The missing data points are flagged and included in the PCD file associated with this WRS scene.

Parameter Name	Size (ASCII Bytes)	Value, Format, Range, and Units	Parameter Description / Remarks
TOTAL_EPHEMERIS_POINTS	1	= 0 - 9	The total number of ephemeris data points received and processed from the PCD of this subinterval. Approximately 7 ephemeris data points can be received for a 26.8 second long WRS scene.
REJECTED_EPHEMERIS_POINTS	1	= 0 - 9	The total number of spacecraft ephemeris data points found to fail LPS PCD quality checks. The rejected data points are flagged and included in the PCD file associated with this WRS scene.
MISSING_EPHEMERIS_POINTS	1	= 0 - 9	The total number of spacecraft ephemeris data points found missing during PCD quality checks. The missing data points are flagged and included in the PCD file associated with this WRS scene.
END_GROUP	As Req'd.	= WRS_SCENE_NN_PROCESSED_PCD_Q&A; where NN = 01 - 99	Beginning of the third level ODL/PVL group. It indicates the end of the processed PCD Q&A data group records for WRS Scene NN.
END_GROUP	As Req'd.	= FORMAT_m_SCENE_NN_METADATA; m = 1 for Format 1 OR m = 2 for Format 2 and NN = 01 - 99 (Up to 35 scenes are expected to be received by LPS in a 14-minute subinterval)	End of the second level ODL/PVL group. It indicates the end of the ETM+ Format 1 or Format 2 Scene NN level Metadata group records.
END_GROUP	As Req'd.	= FORMAT_m_METADATA_FILE; where m = 1 for Format 1 OR m = 2 for Format 2	End of the first level ODL/PVL group. It indicates the end of the LPS Metadata File Level Group records for an ETM+ Format 1 or Format 2 subinterval.

4.2.3 Metadata File Format - HDF ODL/PVL Examples

The examples in the following sections illustrate the structure of the LPS metadata files. The values shown for the metadata parameters are in the ODL format. The accuracy of the example values and their relationship to the example subinterval boundaries, is still being investigated. (TBR)

The ODL procedures described in Applicable document 2.1.7 are used to construct the subinterval, WRS scenes, and individual WRS scene metadata GROUPS. GROUP statements are presented in bold in the example metadata to highlight their role in grouping the various segments of the LPS metadata. (These statements are not required in bold in the LPS metadata implementation). Also, the comment statements enclosed with "/*" and "*/" are shown to clarify the construction of the metadata groups in the metadata example. They are not explicitly required in the implementation of the metadata file.

4.2.3.1 HDF PVL Example - Format 1 Metadata File

/* LPS Level 0R subinterval Metadata file - Format 1 */

BEGIN_GROUP = FORMAT_1_METADATA_FILE;

/* Metadata file identification - Format 1 */

BEGIN_GROUP = FORMAT_1_METADATA_FILE_INFO;

FILE_NAME = L71EDC119813511010.MTA;

FILE_CREATION_DATE_TIME = 1998-05-15T13:30:25Z;

FILE_VERSION_NO = 00;

STATION_ID = "EDC";

SOFTWARE_VER_NO = NNNNN;

IAS_PARAM_FILE_VER_NO = 10;

END_GROUP = FORMAT_1_METADATA_FILE_INFO;

/* Subinterval level metadata - Format 1 */

BEGIN_GROUP = FORMAT_1_SUBINTERVAL_METADATA;

SPACECRAFT_ID = "Landsat7"

SENSOR_ID = "ETM+";

CONTACT_PERIOD_START_TIME = 1998:135:11:23:10;

CONTACT_PERIOD_STOP_TIME = 1998:135:11:37:01;

WRS_PATH = 029;

STARTING_ROW = 020;

ENDING_ROW = 045;

SUBINTERVAL_START_TIME = 1998:135:11:25:01.1234567;

SUBINTERVAL_STOP_TIME = 1998:135:11:35:05.7654321;

TOTAL_ETM+_SCANS = 8853;

PCD_START_TIME = 1998:135:11:25:01.1234567;
PCD_STOP_TIME = 1998:135:11:35:05.7654321;
TOTAL_PCD_MAJOR_FRAMES = 101;
ETM+_LAST_ON_TIME = 1998:135:11:20:01.1234567
ETM+_LAST_OFF_TIME = 1998:135:09:25:01.7654321;
UT1_CORRECTION = +0.1234567;
BAND1_PRESENT_F1 = "Y";
BAND2_PRESENT_F1 = "Y";
BAND3_PRESENT_F1 = "Y";
BAND4_PRESENT_F1 = "Y";
BAND5_PRESENT_F1 = "Y";
BAND6_PRESENT_F1 = "Y";
TOTAL_WRS_SCENES = 25;
PARTIAL_WRS_SCENES = 2;
TOTAL_FILES = 34;
BAND1_FILE_NAME_F1 = L71EDC119813511010.B10;
BAND2_FILE_NAME_F1 = L71EDC119813511010.B20;
BAND3_FILE_NAME_F1 = L71EDC119813511010.B30;
BAND4_FILE_NAME_F1 = L71EDC119813511010.B40;
BAND5_FILE_NAME_F1 = L71EDC119813511010.B50;
BAND6L_FILE_NAME_F1 = L71EDC119813511010.B6L;
MSCD_FILE_NAME = L71EDC119813511010.MSD;
PCD_FILE_NAME = L71EDC119813511010.PCD;
CAL_FILE_NAME = L71EDC119813511010.CAL;
END_GROUP = FORMAT_1_SUBINTERVAL_METADATA;

/* Metadata for all WRS scenes included in the Format 1 subinterval */
/* Note: The WRS scene centers correspond to Band 1 scan times */

BEGIN_GROUP = FORMAT_1_SCENE_01_METADATA;

BEGIN_GROUP = WRS_SCENE_01_METADATA;
WRS_SCENE_NO = 1;
FULL_OR_PARTIAL_SCENE? = "P";
BROWSE_FILE_NAME = L71EDC119813511010.R01;
WRS_PATH = 031;
WRS_ROW = 030;
SCENE_CENTER_SCAN_NO = -175;
SCENE_CENTER_SCAN_TIME = 1998:135:11:26:45.1234567;
SCENE_CENTER_LAT = +42.1234;
SCENE_CENTER_LON = -96.7654;
HORIZONTAL_DISPLAY_SHIFT = +275;
SCENE_UL_CORNER_LAT = +41.5432;
SCENE_UL_CORNER_LON = -96.5432;
SCENE_UR_CORNER_LAT = +41.4321;
SCENE_UR_CORNER_LON = -96.6543;
SCENE_LL_CORNER_LAT = +41.6543;
SCENE_LL_CORNER_LON = -96.3543;
SCENE_LR_CORNER_LAT = +41.3432;
SCENE_LR_CORNER_LON = -96.6543;
SCENE_CCA = 52;

```
UL_QUAD_CCA = 99;
UR_QUAD_CCA = 99;
LL_QUAD_CCA = 4;
LR_QUAD_CCA = 6;
ACCA_ALGORITHM_ID_VER = "ACCA_11MAY98_9999E.ALG";
SUN_AZIMUTH_ANGLE = +20.1234567;
SUN_ELEVATION_ANGLE = +20.1234567;
BAND1_GAIN_F1 = "H";
BAND2_GAIN_F1 = "H";
BAND3_GAIN_F1 = "H";
BAND4_GAIN_F1 = "H";
BAND5_GAIN_F1 = "H";
BAND6_GAIN_F1 = "L";
BAND1_GAIN_CHANGE_F1 = 0
BAND2_GAIN_CHANGE_F1 = 0
BAND3_GAIN_CHANGE_F1 = 0
BAND4_GAIN_CHANGE_F1 = 0
BAND5_GAIN_CHANGE_F1 = "+"
BAND6_GAIN_CHANGE_F1 = 0
FULL_APERTURE_CAL_FLAG = "N";
DAY_NIGHT_FLAG = "D";
END_GROUP = WRS_SCENE_01_METADATA;
```

/* Scene image data quality and accounting (Q&A) data */

```
BEGIN_GROUP = WRS_SCENE_01_ETM+_Q&A;
CADUS/VCDUS_RECEIVED = 543926;
FLYWHEEL_CADUS = 123456;
R-S_ERR_VCDUS = 123;
BCH_CORRECTED_VCDUS = 456;
BCH_UNCORRECTED_VCDUS = 12;
BIT_ERROR_RATE = 10;
ETM+_TIMECODE_ERRORS = 12;
ENTIRELY_FILLED_SCANS = 12;
PARTIALLY_FILLED_SCANS = 123;
END_GROUP = WRS_SCENE_01_ETM+_Q&A;
```

/* Scene PCD quality and accounting information */

```
BEGIN_GROUP = WRS_SCENE_01_PCD_Q&A;
PCD_WORDS_RECEIVED = 106340;
PCD_BYTE_VOTING_ERR = 106;
TOTAL_PCD_MINOR_FRAMES = 20230;
PCD_MINOR_FRAME_ERR = 202;
FILLED_PCD_MINOR_FRAMES = 200;
FILLED_PCD_MAJOR_FRAMES = 1;
END_GROUP = WRS_SCENE_01_PCD_Q&A;
```

/* Processed PCD quality and accounting information on scene */

```
BEGIN_GROUP = WRS_SCENE_01_PROCESSED_PCD_Q&A;
```


TOTAL_ATTITUDE_POINTS = 27;
REJECTED_ATTITUDE_POINTS = 1;
MISSING_ATTITUDE_POINTS = 1;
TOTAL_EPHEMERIS_POINTS = 7;
REJECTED_EPHEMERIS_POINTS = 1;
MISSING_EPHEMERIS_POINTS = 1;
END_GROUP = WRS_SCENE_01_PROCESSED_PCD_Q&A;

END_GROUP = FORMAT_1_SCENE_01_METADATA;

BEGIN_GROUP = FORMAT_1_SCENE_NN_METADATA;

/* Repeat FORMAT_2_SCENE_NN_METADATA GROUP till NN > 25, */
/* the total number of WRS scenes, full or partial, present in this subinterval */

END_GROUP = FORMAT_1_SCENE_NN_METADATA;

END_GROUP = FORMAT_1_METADATA_FILE;

4.2.3.2 HDF PVL Example - Format 2 Metadata File

/* LPS Level 0R subinterval Metadata file - Format 2 */

BEGIN_GROUP = FORMAT_2_METADATA_FILE;

/* Metadata file identification - Format 2 */

BEGIN_GROUP = FORMAT_2_METADATA_FILE_INFO;

File_NAME = L71EDC229813511010.MTA;
FILE_CREATION_DATE_TIME = 1998-05-15T13:30:26Z;
FILE_VERSION_NO = 00;
STATION_ID = "EDC";
SOFTWARE_VER_NO = NNNNN;
IAS_PARAM_FILE_VER_NO = 10;

END_GROUP = FORMAT_2_METADATA_FILE_INFO;

/* Subinterval level metadata - Format 2 */

BEGIN_GROUP = FORMAT_2_SUBINTERVAL_METADATA;

SPACECRAFT_ID = "Landsat7"
SENSOR_ID = "ETM+"
CONTACT_PERIOD_START_TIME = 1998:135:11:23:10;
CONTACT_PERIOD_STOP_TIME = 1998:135:11:37:01;
WRS_PATH = 029;
STARTING_ROW = 020;
ENDING_ROW = 045;
SUBINTERVAL_START_TIME = 1998:135:11:25:01.1234567;
SUBINTERVAL_STOP_TIME = 1998:135:11:35:05.7654321;
TOTAL_ETM+_SCANS = 8853;
PCD_START_TIME = 1998:135:11:25:01.1234567;
PCD_STOP_TIME = 1998:135:11:35:05.7654321;
TOTAL_PCD_MAJOR_FRAMES = 101;
ETM+_LAST_ON_TIME = 1998:135:11:15:01.1234567
ETM+_LAST_OFF_TIME = 1998:135:09:25:01.7654321;
UT1_CORRECTION = +0.1234567;
BAND6_PRESENT_F2 = "Y";
BAND7_PRESENT_F2 = "Y";
BAND8_PRESENT_F2 = "Y";
TOTAL_WRS_SCENES = 25;
PARTIAL_WRS_SCENES = 2;
TOTAL_FILES = 8;
BAND6H_FILE_NAME = L71EDC119813511010.B6H;
BAND7_FILE_NAME_F2 = L71EDC119813511010.B70;
BAND8_FILE_1_NAME_F2 = L71EDC119813511010.B81;
BAND8_FILE_2_NAME_F2 = L71EDC119813511010.B82;
BAND8_FILE_3_NAME_F2 = L71EDC119813511010.B83;
MSCD_FILE_NAME = L71EDC119813511010.MSD;

PCD_FILE_NAME = L71EDC119813511010.PCD;
CAL_FILE_NAME = L71EDC119813511010.CAL;
END_GROUP = FORMAT_2_ SUBINTERVAL_METADATA;

/* WRS scene-by-scene metadata for this Level 0R subinterval */
/* Note: The WRS scene centers correspond to Band 7 scan times */

BEGIN_GROUP = FORMAT_2_ SCENE_01_METADATA;

BEGIN_GROUP = WRS_SCENE_01_METADATA;
WRS_SCENE_NO = 1;
FULL_OR_PARTIAL_SCENE? = "P";
WRS_PATH = 031;
WRS_ROW = 030;
SCENE_CENTER_SCAN_NO = -175;
SCENE_CENTER_SCAN_TIME = 1998:135:11:26:45.1234567;
SCENE_CENTER_LAT = +42.1234;
SCENE_CENTER_LON = -96.7654;
HORIZONTAL_DISPLAY_SHIFT = +275;
SCENE_UL_CORNER_LAT = +41.5432;
SCENE_UL_CORNER_LON = -96.5432;
SCENE_UR_CORNER_LAT = +41.4321;
SCENE_UR_CORNER_LON = -96.6543;
SCENE_LL_CORNER_LAT = +41.6543;
SCENE_LL_CORNER_LON = -96.3543;
SCENE_LR_CORNER_LAT = +41.3434;
SCENE_LR_CORNER_LON = -96.6543;
SUN_AZIMUTH_ANGLE = +20.1234567;
SUN_ELEVATION_ANGLE = +20.1234567;
BAND6_GAIN_F2 = "H";
BAND7_GAIN_F2 = "H";
BAND8_GAIN_F2 = "H";
BAND6_GAIN_CHANGE_F2 = 0
BAND7_GAIN_CHANGE_F2 = "+"
BAND8_GAIN_CHANGE_F2 = 0
FULL_APERTURE_CAL_FLAG = "N";
DAY_NIGHT_FLAG: "D";
END_GROUP = WRS_SCENE_01_METADATA;

/* Scene Image Data quality and accounting (Q&A) data */

BEGIN_GROUP = WRS_SCENE_01_ETM+_Q&A;
CADUS/VCDUS_RECEIVED = 543926;
FLYWHEEL_CADUS = 123456;
R-S_ERR_VCDUS = 123;
BCH_CORRECTED_VCDUS = 456;
BCH_UNCORRECTED_VCDUS = 12;
BIT_ERROR_RATE = 99;
ETM+_TIMECODE_ERRORS = 12;
ENTIRELY_FILLED_SCANS = 12;
PARTIALLY_FILLED_SCANS = 123;

END_GROUP = WRS_SCENE_01_ETM+_Q&A;

/* Scene PCD quality and accounting information */

BEGIN_GROUP = WRS_SCENE_01_PCD_Q&A;

PCD_WORDS_RECEIVED = 106341;

PCD_BYTE_VOTING_ERR = 106;

TOTAL_PCD_MINOR_FRAMES = 20230;

PCD_MINOR_FRAME_ERR = 202;

FILLED_PCD_MINOR_FRAMES = 199;

FILLED_PCD_MAJOR_FRAMES = 1;

END_GROUP = WRS_SCENE_01_PCD_Q&A;

/* Processed PCD quality and accounting information on scene */

BEGIN_GROUP = WRS_SCENE_01_PROCESSED_PCD_Q&A;

TOTAL_ATTITUDE_POINTS = 27;

REJECTED_ATTITUDE_POINTS = 1;

MISSING_ATTITUDE_POINTS = 1;

TOTAL_EPHEMERIS_POINTS = 7;

REJECTED_EPHEMERIS_POINTS = 1;

MISSING_EPHEMERIS_POINTS = 1;

END_GROUP = WRS_SCENE_01_PROCESSED_PCD_Q&A;

END_GROUP = FORMAT_2_SCENE_01_METADATA;

BEGIN_GROUP = FORMAT_2_SCENE_NN_METADATA;

/* Repeat FORMAT_2_SCENE_NN_METADATA GROUP till NN > 25, */

/* the total number of WRS scenes, full or partial, present in this subinterval */

END_GROUP = FORMAT_2_SCENE_NN_METADATA;

END_GROUP = FORMAT_2_METADATA_FILE;

4.3 Multiband Browse File Format (HDF RIS24)

The LPS produces a multiband scene browse for each of the WRS scenes identified during Level 0R processing of a ETM+ Format 1 subinterval. Each multiband browse (image) scene consists of an HDF RIS24 file and is identified in the metadata file associated with its ETM+ Format 1 subinterval. An LPS multiband scene browse image consists of three 8-bit reduced size image planes generated from three ETM+ Format 1 bands (1 through 5) selected by the operator. No multiband scene browses are generated by LPS for the ETM+ Format 2 bands (6, 7 and 8). The LPS operator may use the band quality/history information (a band is functional or not functional (dead)), provided by IAS in the Landsat 7 Calibration Parameters file, as guidance in selecting a set of three Format 1 bands (1 - 5) for producing multiband scene browse files (**TBR** - EDC suggestion, LPS CCR). The selection of these band, if necessary, can be modified by the operator before the start of the processing of a contact period.

This section provides specific details on the output format of the LPS multiband scene browse file and the various parameters used in its generation. These parameters provide specific details on data reduction of the LPS band files to multiband scene browse files and their output in the HDF RIS24 format. Additional and reference information on the generation of HDF RIS24 formatted multiband scene browses is provided in Applicable Document 2.1.8. An overview of the LPS produced multiband multiband scene browse is provided in Figure 4-5.

4.3.1 Multiband Browse File Overview

An LPS multiband scene browse file consists of an HDF RIS24 image object and ancillary information on source (Format 1) band data, band data reduction and multiband scene browse labeling. A multiband scene browse, produced from a set of three Format 1 source bands, consists of three 8 bit reduced size image planes which are interleaved by plane in the HDF RIS24 format. All three reduced size image planes are of the same size and aspect ratio. The size of the reduced size image planes depends on the size of the source band data selected (LPS operational parameters) for a WRS scene. The nominal size of a WRS scene (using Format 1 Bands 1- 5) is expected to be selected/fixed to 6600 pixels (number of bytes in a scan line) x 6000 scans lines (Reference: Section 4.1.1.2 on band data sizing) The LPS uses a subsampling factor of 2 (reduction by 4) and two Wavelet runs (another reduction by 16 (4x4)) for producing each reduced size image plane. Three reduced size image planes, each consisting of 825 pixels (bytes) x 750 lines, are produced. Figure 4-6 provides an overview of the LPS multiband scene browse consisting of three reduced size image planes. The nominal size of a multiband scene browse is expected to be approximately 1.86 MB. Additional data reduction (e.g., subsampling, or Wavelet or JPEG compression may be required to meet the ECS-HDF 1 MB constraint for multiband browse files (**TBR** - ECS/LPS requirement allocation).

During data reduction processing (subsampling and Wavelet), the LPS alternates source band-detector selections between WRS scenes. The LPS may pick odd number detectors and pixels for odd number WRS scenes and even number detectors for even number WRS scenes for subsampling (**TBR** - LPS design check) the selected bands. This alternating of source band detectors and pixels between scenes is expected to assist the Landsat users in learning about the quality of the Level 0R data available while reviewing multiband scene browses.

The LPS can also receive partial WRS scenes (less than 6000 scan lines) at the start or end of a subinterval. A Partial WRS scene may contain fill data in the portion of the WRS scene (balance of 6000 lines) for which no band data is received. A partial WRS scene, containing fill data, is treated as a full WRS scene during generation of a multiband scene browse. The resulting multiband scene browse for a partial WRS scene contains both the source band data and fill data.

Tables 4-18 and 19 provide specific details on the parameters required for generating the HDF RIS24 objects and labels of the multiband scene browse files. The LPS does not identify/define any parameter for enhancing the multiband scene browses (images) because the use of color palettes is not supported by HDF RIS24 objects. The use of color pallets is only supported by HDF RIS8 objects.



Notes:

- One band browse size: $750 \times 825 = 0.62$ MB
- Multiband browse file size: $3 \times 0.62 = 1.86$ MB (3 8-bit planes, without JPEG)
- Subsampling factor 2 (reduction by 4)
- Wavelet Runs: 2 (Reduction by 16)
- Total Subsampling and Wavelet Reduction: 64
- ECS-HDF multiband browse output image constraint: 1 MB (maximum)
- HDF/JPEG ratio: ~ 50% (**TBR** - If performed by LPS to meet the 1 MB constraint.
- The browse image aspect ratio is maintained through all data reduction and compression operations.

Figure 4-6: Multiband Scene Browse File - 24-bit Raster Image

**Table 4-18: Multiband Browse File - HDF RIS24 Object Definition
(Parameter Values)**

RIS24 Object Definition Parameters	Type	Size	Values, Format, Range and Units	Parameter Description / Remarks
image_file_name	char8	22	= L7XsssfnYYDOYHHuuv.xxx where xxx = "R"nn and, nn = 1 - 99 "R" indicates a multiband scene browse file.	Complete details on the LPS file naming convention are provided in Section 3.4. At present, approximately 35 multiband scene browses are expected in a 14 minute long subinterval.
image_dimension_width	int32	1	= 825 pixels per scan line in each image plane	Based on a scan line length of 6600 pixels/bytes as noted in Section 4.11.2.
image_dimension_height	int32	1	= 750 scan lines in each image plane	Based on a WRS scene size of 6000 scan lines, including scene overlaps, as noted in Section 4.11.2.
image_dimension_depth	int32	1	= 3 byte deep pixel; 3 image planes	Implies a 3 band (multiband) multiband scene browse.
image_data	uint8	1	= 825 x 750 data bytes (pixels) in each image plane	
image_interlace_il	int32	1	= DFIL_PLANE	Interlace by plane (DFIL_PLANE) is recommended to keep each band data lines in a single plane under the HDF RIS24 scheme. HDF utilities are available to read multiband browse data from any one of the three RIS24 planes (any one of the three bands).

RIS24 Object Definition Parameters	Type	Size	Values, Format, Range and Units	Parameter Description / Remarks
image_compression	char8	4	= "JPEG" (TBR)	A multiband scene browse is expected to be as large as 1.8 MB after a 4-to-1 subsampling (a factor of 2) and two Wavelet runs (a factor of 16) on the input scene data from three bands. Additional compression, such as JPEG (TBR), may be required to reduce a multiband scene browse file to under 1 MB to meet the ECS-HDF file size limitation. At present, the HDF supported JPEG compression of multiband scene browse files is not performed by either the LPS or the EDC DAAC (TBR).
compression_quality_factor	N/A	1	= 50 (TBR)	To reduce the output multiband scene browse size to under 1 MB using HDF/JPEG (TBR).
compression_baseline	N/A	1	= 1 (TBR)	HDF required, set to ON =1 for JPEG (TBR)
image_objects_per_ris24_file	char8	1	= 1	One image object in an HDF RIS24 file is included to be able to meet the ECS-HDF limitation of 1 MB for LPS multiband browse files.

**Table 4-19: Multiband Browse RIS24 File Label and Description
(Parameter Values)**

RIS24 Object Annotation Information ** Multiband Browse ASCII Text lines are shown in ** double quotes. Omit in HDF implementation.	Size (ASCII Bytes)	Value, Format, Range, and Units	Parameter Description / Remarks
multiband_browse_file_label	22	= L7XsssfnYYDOYHHuuv.xxx where xxx = "R"nn and, nn = 1 - 99 for a multiband scene browse number within a subinterval. "R" indicates a multiband scene browse file.	Complete details on the LPS file naming convention are provided in Section 3.4. At present, approximately 35 multiband scene browses are expected in a 14 minute long subinterval.
ref_metadata_file_name	22	= L7XsssfnYYDOYHHuuv.xxx where xxx = "MTA"	See Section 3.4 for details on the LPS file naming convention.
band_ids	3	= ABC where A = 1 -5, B = 1- 5, and C = 1- 5	The three ETM+ Format 1 bands (each being 1 of the 5) selected for generating the multiband scene browse.
starting_detector_pixels	6	= "Odd" or "Even"	Indicates the use of either odd number detectors and pixels to start a subsampling operation for the selected bands.
subsample_factor	1	= S where S = 2, 4 or 8	The subsampling scheme (pick Sth. detector/pixel) used in input data reduction. If S=2, every 2nd. (other) detector pixel is picked for subsampling. A factor of 2 reduces an input image to 1/4th; a factor of 4 reduces the input to 1/16th, and so on. The LPS uses a subsample factor of 2.

wavelet_runs	1	= 1 - 4 Wavelet runs	The number of Wavelet runs used to generate the multiband scene browse. Each run reduces the input image size to 1/4th. The LPS uses 2 Wavelet runs in its multiband browse scheme.
jpeg_reduction (TBR)	1	= 0 - 50 (TBR) Percent compression of input data.	If selected, indicates the extent of data compression applied after subsampling and Wavelet. A value of 0% indicates that no compression is applied. A value of 50% indicates that the input image is reduced by half.

Acronym List

ACCA	Automated Cloud Cover Assessment
ADS	Attitude Displacement Sensors
AOS	Acquisition of Signal
BCH	Bose-Chaudhuri-Hocquenghem
BER	Bit Error Rate
CADU	Channel Access Data Unit
CAL	LPS file extension for "Calibration Data"
Cal. Data	Calibration Data
CCB	Configuration Control Board
CCR	Configuration Change Request
CCSDS	Consultative Committee on Space Data System
CFPA	Cold Focal Plane Array
DAAC	Distributed Active Archive Center
DCN	Document Change Notice
DFCB	Data Format Control Book
DOY	Day of Year
ECS	EOSDIS Core System
EDC	EROS Data Center
EDC DAAC	EDC Distributed Active Archive Center
EOL	End of Line
EOSDIS	Earth Observation Data Information System
EROS	Earth Resources Observation System
ESDIS	Earth Science Data & Information System
ETM+	Enhanced Thematic Mapper plus
EU	Engineering Unit
F&PS	Functional and Performance Specification
FHS	First Half Scan Error
GB	Gigabytes
GMT	Greenwich Mean Time
GNC	Gatineau, Canada (Satellite ground station)
GSFC	Goddard Space Flight Center
HDF	Hierarchical Data Format
HDS	Horizontal Display Shift
ICD	Interface Control Document
ID	Identification
IGS	International Ground Station (4-56)
IMU	Inertial Measurement Unit
L7	Landsat 7
LAN	Local Area Network
LSC	Line Sync Code

LGS	Landsat 7 Ground Station
LHS	Left Hand Side
LOS	Loss of Signal
LPS	Landsat 7 Processing System
MD	Maryland
MOC	Mission Operations Center
MO&DSD	Mission Operations and Data Systems Directorate
MOSDD	Mission Operations and Systems Development Division
MSC	LPS file extension for "MSCD"
MSCD	Mirror Scan Correction Data
MTA	LPS file extension for "Metadata"
Mux	Multiplexer
NASA	National Aeronautics and Space Administration
NCSA	National Center for Supercomputing Applications
ODL	Object Description Language
PCD	Payload Correction Data
PVL	Parameter Value Language
RHS	Right Hand Side
RIS24	24-bit Raster Image Set
Q&A	Quality and Accounting
SDS	Scientific Data Set
SHS	Second Half Scan Error
SCN DIR	Scan Direction
SLD	Scan Line Data
SV	Space Vehicle (Spacecraft)
TBD	To be determined
TBR	To be reviewed/resolved
TLM	Telemetry
UTC	Universal Time Code
VCDU	Virtual Channel Data Unit
WRS	Worldwide Reference Systems